

**ROHDE & SCHWARZ**


Make ideas real



# PROBES AND ACCESSORIES

For Rohde & Schwarz oscilloscopes

Product Brochure | Version 19.00

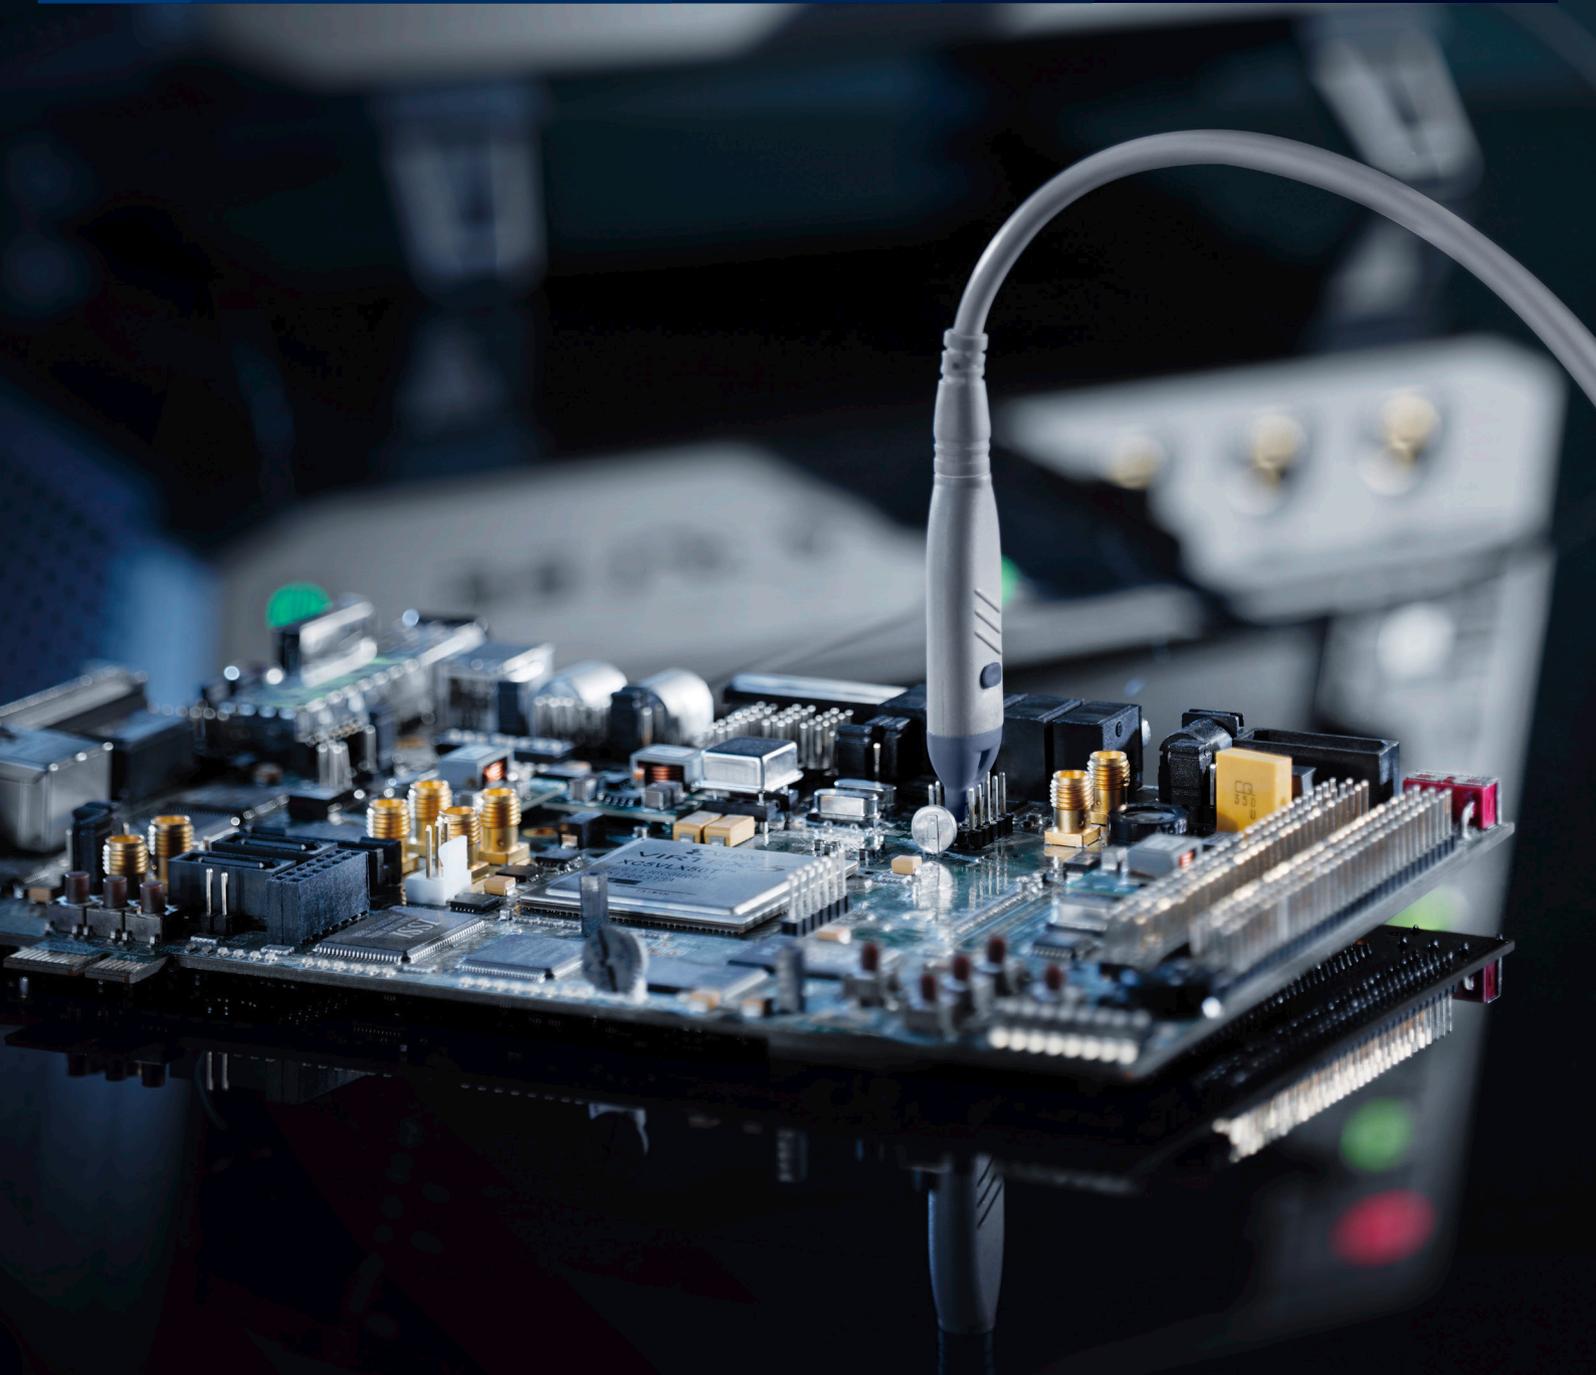

# AT A GLANCE

Oscilloscope test applications include debugging complex electronic circuits, measuring high-speed-bus signal integrity and characterizing power electronics with hazardous voltage levels. Measurement accuracy and operator safety depend on these probes and accessories.

Rohde&Schwarz passive probes are ideal for general-purpose measurements of low-frequency signals. The precision-engineered, spring-loaded tips ensure reliable and accurate contact with signal lines. The new MXO series oscilloscopes come standard with 700 MHz passive probes.

Rohde&Schwarz active broadband probes deliver exceptional performance when a minimal load on the device under test (DUT) is crucial or when measuring high-frequency signal components. The probes have an ultra-low load and a wide dynamic range for accurate measurements. The integrated, high-precision DC voltmeter quickly and easily tests DC levels on signal lines, independent of the oscilloscope settings. The unique micro button on the probe tips is configurable. Controlling RUN/STOP and saving screenshots give users flexibility and make setting up measurements easy.

Safety is vital when measuring power electronics. Rohde&Schwarz high voltage and current probes ensure safe and reliable CAT III testing. The R&S®RT-ZISO isolated probing system has high common-mode rejection of 60 kV even at high bandwidths of 1 GHz and is ideal for wide bandgap power technology testing.

Our EMC near-field probes also open up new possibilities for oscilloscope applications. When combined, the MXO series and R&S®RTO6 oscilloscopes provide exceptional spectrum analysis capabilities for EMC troubleshooting.

We have a comprehensive range of probe accessories for optimal signal contacting and measurement flexibility. Our accessories are designed to meet your specific measurement application needs with fine, spring-loaded tips, high-voltage probes and current probes. You know you have the right tools for the job with Rohde&Schwarz.

## KEY FACTS

- ▶ Probes for every application: differential or single-ended voltage measurements, current measurements, EMC near-field measurements
- ▶ Active probes with very low loads thanks to high input impedance of up to 1 M $\Omega$  || 0.3 pF and a wide dynamic range of  $\pm 8$  V
- ▶ Modular broadband probes with low capacitive loading and flexible and configurable connectivity
- ▶ R&S®ProbeMeter: integrated voltmeter with 0.1% measurement uncertainty for precise DC measurements
- ▶ Simple operation using the configurable micro button
- ▶ Comprehensive accessories for maximum flexibility during contacting
- ▶ Passive probes included with every Rohde & Schwarz oscilloscope
- ▶ **NEW:** Isolated probing system for high voltage and fast switching environment up to 1 GHz bandwidth, > 90 dB CMRR with  $\pm 60$  kV common mode range

# MODELS



**Passive probes**  
▶ page 8



**Passive broadband probes**  
▶ page 10



**Active broadband probes**  
▶ page 12



**Modular broadband probes**  
▶ page 18



**Power rail probe**  
▶ page 20



**Multichannel power probe**  
▶ page 22



**High voltage probes**  
▶ page 26



**Optically isolated probes**  
▶ page 30



**Current probes**  
▶ page 32



**EMC near-field probes**  
▶ page 34

## Accessories

- ▶ R&S®RT-Z2T probe interface adapter, R&S®RT-ZA29/ZAP probe positioners and R&S®FExx external frontends
- ▶ page 35

# SELECTING THE RIGHT PROBE

The first step in selecting the right probe is analyzing the measurement task. Is a single-ended or differential measurement needed? Which maximum frequency components need to be transferred? What is the maximum input voltage?

## Differential or single-ended measurements

Differential probes enable voltage readings between two points without a common ground reference, which is very valuable when analyzing floating circuits or characterizing switching power supplies. While primarily designed for differential signals, the probes can also perform single-ended measurements. However, traditional single-ended probes often have higher input impedance, lower input capacitance and a wider dynamic range. The key characteristics in a differential probe suppress common mode signals, making them better in noisy environments.

## Bandwidth and rise time

Bandwidth is one of the most important probe selection parameters. It defines the cutoff frequency, after which a signal appears 3 dB or 30% weaker than they actually are. Accurate signal representation requires a cutoff frequency for the measurement system (oscilloscope and probe) that is greater than the highest frequency component displayed. When measuring digital signals, the measurement bandwidth should be three to five times greater than the clock rate. When debugging a digital design, the bandwidth should be three times greater. For conformance tests on digital interfaces, bandwidth must be five times greater than the clock rate.

When measuring fast slopes (to characterize switching power supplies) the rise time for the measurement system (oscilloscope and probe) is critical.

## Dynamic range

The dynamic range for a probe is the maximum measurable input voltage. It is specified for DC voltage and often decreases when frequency increases. Differential probes also have distinct dynamic ranges when in common or differential modes. The common mode dynamic range determines the valid input voltage range for a single differential input, measured with reference to ground. The differential mode dynamic range defines the maximum measurable input differential voltage.

To accurately measure steep, large-amplitude slopes, a sufficiently wide dynamic range is needed at high frequencies. When measuring residual ripple in DC switching power supplies, very small signals with large DC components also need to be measured. Modern probes can feed in a DC offset for full A/D converter resolution.

Operator safety is vital with high voltage probes. High voltage probes have special insulation, protection against accidental contact and other protective mechanisms. The probes are characterized by maximum voltage to ground and measurement category. The measurement category defines the measurement environment where operators remain protected. A probe may only be used in its defined measurement categories.



## Load on device under test (DUT)

A measurement system must not overload the circuit under test to prevent signal degradation and ensure that the DUT functions properly. The key is probes with high input impedance and low input capacitance. The resulting input impedance depends mainly on the frequency and is typically less than 500  $\Omega$  at the probe's cutoff frequency.

Passive probes typically have an input impedance of 10 M $\Omega$  at an input capacitance of > 10 pF. Active probes typically have an input capacitance of < 1 pF at an input impedance of 1 M $\Omega$  and are especially suited for measurements on circuits with high-speed signals > 100 MHz. Measurements demand proper probe accessories for contact with the DUT. Long pins and leads increase capacitance and inductance. Lowering the maximum measurement bandwidth leads to excessive overshoot and ringing artifacts on the pulse slopes.

## Expanded functions and probe accessories

In addition to performance parameters, supplemental functions can also simplify daily tasks. Examples include an integrated digital voltmeter or the micro button. The micro button can be configured to allow direct control of an oscilloscope from the probe.

Diverse accessories provide flexibility during test point contacting, make day-to-day work easier and help prevent measurement errors. Available accessories include rigid and spring-loaded tips, browsers, adapters, probe positioners and extension leads. Rohde & Schwarz offers a comprehensive set of accessories for every probe.



Probe (R&S®)	Probe interface	Recommended oscilloscope family	Usable oscilloscope family <sup>1)</sup>
<b>Passive probes</b>			
RT-ZP1X	BNC	R&S®RTC1000, R&S®RTB 2, R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP <sup>2)</sup>	R&S®RTH1000 (R&S®ScopeRider RTH)
RT-ZI10/-ZI10C/-ZI11	BNC	R&S®RTH1000 (R&S®ScopeRider RTH)	
RT-ZP03S	BNC	R&S®RTC1000, R&S®RTB 2	R&S®RTM3000, R&S®RTA4000, MXO 4
RT-ZP05S	BNC	R&S®RTM3000	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C
RTM-ZP10	BNC	only for discontinued R&S®RTM2000	
RT-ZP10	BNC	R&S®RTA4000, R&S®RTO6	R&S®RTM3000, MXO 4, MXO 5, MXO 5C, R&S®RTP <sup>2)</sup>
RT-ZP11	BNC	MXO 4, MXO 5, MXO 5C, R&S®RTO6	R&S®RTM3000, R&S®RTA4000, R&S®RTP <sup>2)</sup>
RT-ZPMMCX	BNC	MXO 4, MXO 5, MXO 5C	R&S®RTM3000, R&S®RTA4000, R&S®RTO6, R&S®RTP <sup>2)</sup>
<b>Passive broadband probes</b>			
RT-ZZ80	SMA/BNC	R&S®RTO6, R&S®RTP	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C
<b>Active broadband probes</b>			
RT-ZS10E/-ZS10/-ZS20/-ZS30/-ZS60	Rohde & Schwarz probe interface	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP	
RT-ZD10/-ZD20/-ZD30/-ZD40	Rohde & Schwarz probe interface	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP	
<b>Modular broadband probes</b>			
RT-ZM15/-ZM30/-ZM60/-ZM90/-ZM130/-ZM160	Rohde & Schwarz probe interface	MXO 5, MXO 5C, R&S®RTO6, R&S®RTP	R&S®RTM3000, R&S®RTA4000, MXO 4
<b>Power rail probe</b>			
RT-ZPR20/-ZPR40	Rohde & Schwarz probe interface	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP	
<b>Multichannel power probe</b>			
RT-ZVC02/-ZVC04	MSO interface	R&S®RTO6, R&S®RTP	
<b>High voltage probes</b>			
RT-ZH03/-ZH10/-ZH11	BNC	R&S®RTC1000, R&S®RTB 2, R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6	R&S®RTP <sup>2)</sup>
RT-ZHD07/-ZHD15/-ZHD16/-ZHD60	Rohde & Schwarz probe interface	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP <sup>2)</sup>	
<b>Current probes</b>			
RT-ZC02/-ZC03	BNC	R&S®RTH1000 (R&S®ScopeRider RTH), R&S®RTC1000, R&S®RTB 2	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP <sup>2)</sup>
RT-ZC10/-ZC20/-ZC30/-ZC31	BNC	R&S®RTC1000, R&S®RTB 2, R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP <sup>2)</sup>	R&S®RTH1000 (R&S®ScopeRider RTH)
RT-ZC05B/-ZC10B/-ZC15B/-ZC20B	Rohde & Schwarz probe interface	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP <sup>2)</sup>	
<b>EMC near-field probes</b>			
HZ-15/HZ-17	BNC	R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP	
<b>Isolated probing system</b>			
RT-ZISO	Rohde & Schwarz probe interface	MXO 4, MXO 5, MXO 5C, R&S®RTO6, R&S®RTP	

<sup>1)</sup> Limited functions possible.

<sup>2)</sup> Requires R&S®RT-Z1M 1 MΩ adapter.



# NEW: MXO 5, MXO 5C Series OSCILLOSCOPE AND R&S® RT-ZISO ISOLATED PROBING SYSTEM

# PASSIVE PROBES

Passive probes are standard Rohde & Schwarz oscilloscope accessories. They are low-cost, general purpose probing solutions for a broad range of applications.

## Universal application

Rohde & Schwarz passive probes are all-rounders. They are low-cost, general purpose solutions for a broad range of applications. The BNC connector lets them be used with almost any oscilloscope. Passive probes with readout pins let Rohde & Schwarz oscilloscopes automatically detect attenuation factors. A spring-loaded tip ensures good contact with the DUT.



Passive probes: all-rounders for every oscilloscope



R&S®RT-ZA4 mini clips and R&S®RT-ZA5 micro clips for reliable contacting, especially when using multiple probes



Extensive R&S®RT-ZA1 accessory set for optimal contacting

### Individual adjustment for precise measurement

Optimum measurement accuracy demands that passive probes with a bandwidth greater than 350 MHz be adjusted to the oscilloscope input impedance. The R&S®RT-ZP10 500 MHz passive probe comes preadjusted for R&S®RTA4000, R&S®RTP and R&S®RTO6 oscilloscopes. The R&S®RT-ZP11 700 MHz passive probe comes preadjusted for the latest MXO 4 and MXO 5 oscilloscopes.

The R&S®RT-ZPMMCX probe is also a perfect addition for many test applications.

### Extensive accessories

Rohde & Schwarz offers the R&S®RT-ZA1 passive probe accessory set for optimal contacting. The set includes spare spring-loaded tips, rigid tips, ground contact springs, ground leads and color-coded rings.

For more details,  
see our website:



Model	Bandwidth	Attenuation factor	Input impedance	Dynamic range	Comment	Order No.
<b>Probes</b>						
R&S®RT-ZP1X	38 MHz	1:1	1 MΩ    39 pF	55 V (RMS) CAT II	2.5 mm probe tip, spring-loaded	1333.1370.02
R&S®RT-ZP03S	300 MHz	10:1	10 MΩ    12 pF	400 V (RMS)/55 V (RMS)	robust 5 mm probe tip, no readout	1803.1001.02
R&S®RT-ZP05S	500 MHz	10:1	10 MΩ    10 pF	300 V (RMS)	5 mm probe tip, spring-loaded	1333.2401.02
R&S®RTM-ZP10	500 MHz	10:1	10 MΩ    9.5 pF	400 V (RMS), 300 V (RMS) CAT II	2.5 mm probe tip, spring-loaded, preadjusted for R&S®RTM3000	1409.7708.02
R&S®RT-ZP10	500 MHz	10:1	10 MΩ    9.5 pF	400 V (RMS), 300 V (RMS) CAT II	2.5 mm probe tip, spring-loaded, preadjusted for R&S®RTO6/RTA4000	1409.7550.00
R&S®RT-ZP11	700 MHz	10:1	10 MΩ    9.5 pF	400 V (RMS), 300 V (RMS) CAT II	0.5 mm spring tip gold plated preadjusted for MXO 4/MXO 5	1803.0005.02
R&S®RT-ZPMMCX	700 MHz	25:1	14.9 MΩ    < 4 pF	±42 V (peak), 30 V (RMS), ±60 V DC	probe input: MMCX (male)	1803.1599.02
R&S®RT-ZI10	500 MHz	10:1	10 MΩ    12 pF	600 V (RMS) CAT IV, 1000 V (RMS) CAT III	for R&S®Scope Rider RTH	1326.1761.02
R&S®RT-ZI10C	500 MHz	10:1	10 MΩ    11 pF	300 V (RMS) CAT III	compact laboratory probe, for R&S®Scope Rider RTH	1326.3106.02
R&S®RT-ZI10C-2	500 MHz	10:1	10 MΩ    11 pF	300 V (RMS) CAT III	dual-pack of R&S®RT-ZI10C	1333.1811.02
R&S®RT-ZI10C-4	500 MHz	10:1	10 MΩ    11 pF	300 V (RMS) CAT III	quad-pack of R&S®RT-ZI10C	1333.1328.02
<b>Accessories</b>						
R&S®RT-ZA1					accessory set for R&S®RTM-ZP10/RT-ZP10/RT-ZP1X	1409.7566.02
R&S®RT-ZA4					mini clips	1416.0428.02
R&S®RT-ZA5					micro clips	1416.0434.02
R&S®RT-ZA6					lead set	1416.0440.02
R&S®RT-ZA21					extension set for R&S®RT-ZI10/RT-ZI11	1326.1984.02
R&S®RT-ZA40					probe tip accessory set for R&S®RT-ZP03S/-ZP05S/-ZH03, includes rigid and flexible probe tips	1338.0742.02
R&S®RT-ZA41					accessory set for R&S®RT(M)-ZP10, R&S®RT-ZP11 and R&S®RT-ZP1X	1802.9867.02

# PASSIVE BROADBAND PROBES

Low noise, high linearity and passive implementation make passive broadband probes an economical solution to measuring controlled impedance lines. The compact design facilitates measurements on densely packed printed circuit boards.

## Economical alternative for measurements on controlled impedance lines

Passive broadband probes are economical, yet powerful alternatives to active probes for measuring high-speed signals on low impedance lines. In contrast to active probes, their input impedance is low but remains practically constant over the entire frequency range. They feature an extremely low input capacitance and low noise. Their passive implementation renders them highly linear and ideal for spectrum analysis applications.


The R&S®RT-ZZ80 8 GHz probe has an attenuation factor of 10:1 at an input impedance of  $500 \Omega \parallel 0.3 \text{ pF}$ . The SMA plug is connected to the oscilloscope via the SMA-BNC adapter. The probe can be easily selected as a predefined probe from the R&S®RTO6 or R&S®RTP oscilloscope menu. Correctly configure an instrument in a few simple steps.



Passive broadband probes: powerful alternative for measurements on controlled impedance lines


## Maximum bandwidth through customized accessories

The maximum probe bandwidth is defined by its accessories. Rohde&Schwarz supplies accessories tailored to both the probe and the application to provide the maximum bandwidth for several contacting methods. The extensive standard accessories for the R&S®RT-ZZ80 include solder-in pins, rigid tips, solder-in ground pins, spring-loaded ground tips and pin connector adapters. Since all probe tips have the same design, R&S®RT-ZZ80 accessories are compatible with both single-ended and differential active probes (R&S®RT-ZS60 and R&S®RT-ZD40).

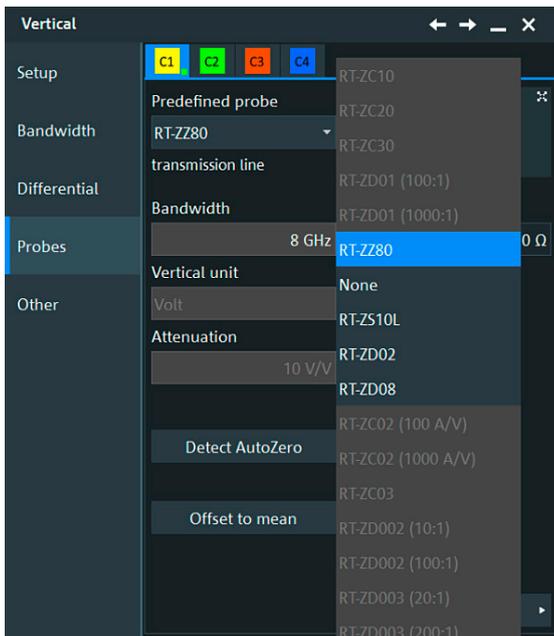

Selecting predefined probes with SMA or BNC connector on the R&S®RT06

## Input impedance versus frequency

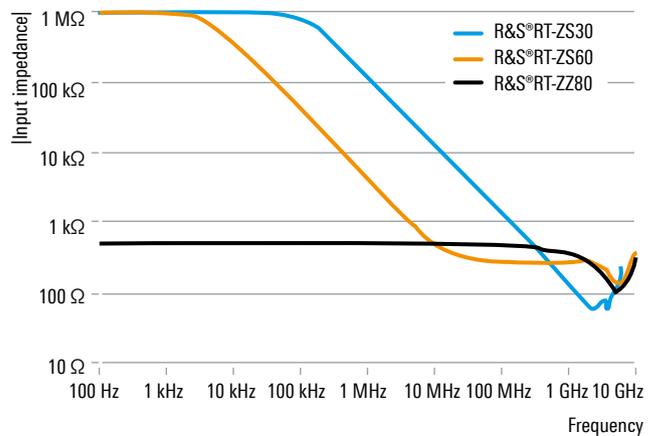

Model	Bandwidth	Attenuation factor	Input impedance	Dynamic range	Comment	Order No.
<b>Probe</b>						
R&S®RT-ZZ80	8 GHz	10:1	500 Ω    0.3 pF	20 V (RMS) max. input voltage	SMA-BNC adapter included	1409.7608.02

# ACTIVE BROADBAND PROBES


Rohde & Schwarz has an extensive range of active broadband probes with high input impedance of 1 M $\Omega$ , low input capacitance of < 1 pF and a wide dynamic range. Useful functions, such as offset compensation, a high-precision integrated voltmeter and a micro button for convenient oscilloscope control set the probes apart.

## Designed for high bandwidths

High-bandwidth probes are only possible with application-specific integrated circuits (ASIC). Rohde & Schwarz ASICs focus on performance. The result is low noise, high DC accuracy and minimal drift versus temperature and time. Individual laser trimming of the probes in production results in very high accuracy and a very flat frequency response. The contact accessory designs also permit a high measurement bandwidth for various contacting methods, including manual contacting, solder-in and plug-in connections. The compact probe head allows measurements even on densely populated printed boards, and the low weight keeps the load at the contact point to a minimum.

## Minimal influence on the measurement signal

When measuring high-speed signals in modern electronic designs, the probe load must be low. Rohde & Schwarz active probes have 1 M $\Omega$  input impedance at an input capacitance of < 1 pF to minimize the influence on the circuit during measurements. The optimized probe tip design and accessories ensure accurate rise times and minimize overshoot and ringing.

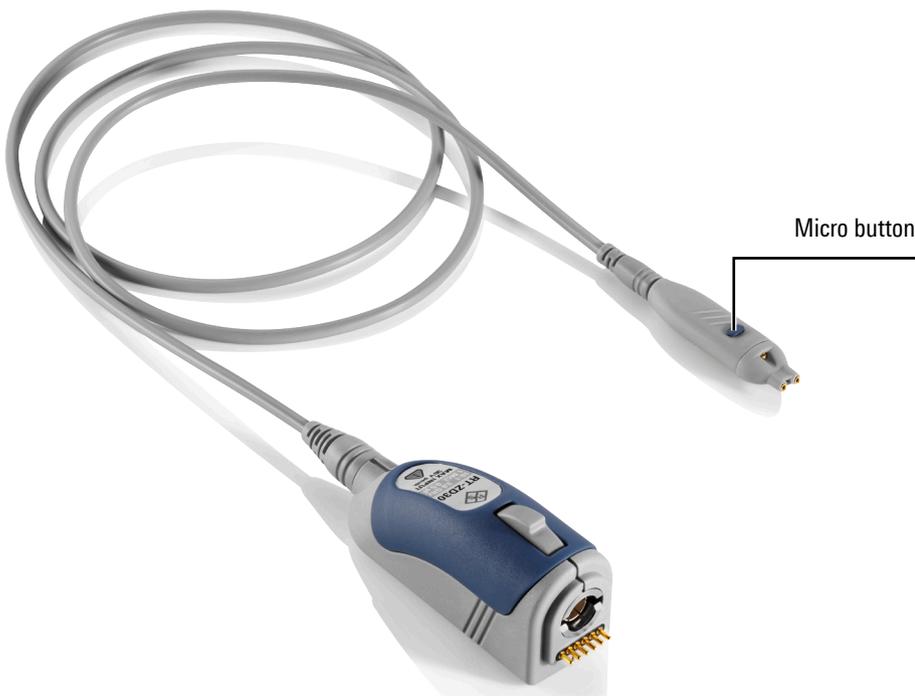

R&S®RT-ZS10/20/30



R&S®RT-ZS60



R&S®RT-ZD10/20/30



R&S®RT-ZD40

Rohde & Schwarz active broadband probes with a variety of heads to match the application (e.g. R&S®RT-ZS60/-ZD40: special head design for particularly low input capacitance)

**Wide dynamic range and high linearity:  
ideal for spectrum analysis**

All Rohde&Schwarz active broadband probes have a wide dynamic range that is also available at high frequencies. Even very fast signals and steep, high-amplitude pulse slopes can be measured. The R&S®RT-ZS60 single-ended probe has high linearity (THD of -70 dB at 16 V peak-to-peak at 1 GHz) and is ideal for measurements with very stringent linearity requirements (such as widespan FFT analyses with oscilloscopes). The optional R&S®RT-ZA9 N(m) adapter lets Rohde&Schwarz broadband probes be used with spectrum and signal analyzers.

**Integrated micro button for convenient instrument control**

Measuring with multiple probes often requires a third hand to operate the oscilloscope. The integrated micro button on the probe tip solves this problem. The button can be configured on Rohde&Schwarz oscilloscopes to perform a variety of functions, such as run/stop, auto set or save waveform.

**R&S®ProbeMeter: integrated, high-precision voltmeter**


Rohde&Schwarz active probes have an integrated voltmeter that operates independently of the oscilloscope and can measure the DC component of a signal with 0.1 % accuracy. The full dynamic range of the R&S®ProbeMeter is always available, regardless of the oscilloscope settings. Supply voltages and operating points can be quickly and precisely measured and DC components can be automatically compensated in AC measurements – with optimal dynamic range. In differential probes, the DC components of the input signal differential and common mode components can be measured simultaneously.

**Integrated memory and future-ready probe interface**


Rohde&Schwarz active broadband probes have a data memory loaded with probe-specific calibration data for maximum accuracy and automatic probe detection. Active probes have a probe interface with a precision BNC-compatible connector that can transmit signals up to 18 GHz. The probes will also be compatible with future Rohde&Schwarz broadband oscilloscopes.



R&S®RT-ZA9 N(m) adapter for active broadband probes for use with signal and spectrum analyzers

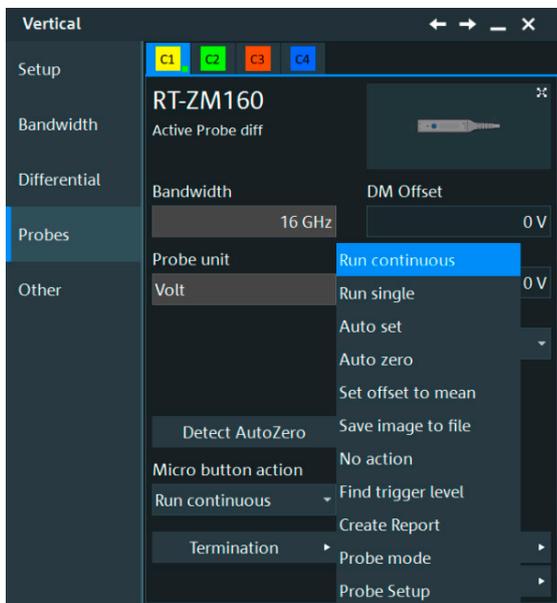

Flexible configuration of the micro button function on the oscilloscope

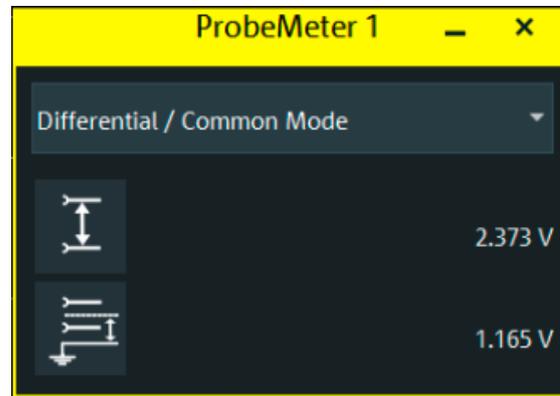

R&S®ProbeMeter: high DC measurement accuracy, independent of the instrument settings and in parallel with the measurement channel

# SINGLE-ENDED BROADBAND PROBES

A wide dynamic range, exceptionally low offset and gain errors and the right accessories make these probes ideal for Rohde & Schwarz oscilloscopes.

## High signal fidelity with active probes

Single-ended active probes accurately measure ground-referenced signals. They precisely measure both high-speed and low-frequency signals. The probe impedance must place a minimal load on the test point. Rohde & Schwarz has a variety of models with a maximum bandwidth of up to 6 GHz. Rohde & Schwarz single-ended active probes feature high input impedance of 1 M $\Omega$ , low input capacitance of 0.3 pF and noise of 2 mV (RMS) referenced to the input.


## Wide dynamic range with additional offset compensation

In addition to the wide dynamic range, Rohde & Schwarz single-ended active probes also have offset compensation. The DC component of the measured signal can be compensated so that the signal components of interest are displayed on the oscilloscope at maximum resolution.

A low voltage, single-ended probe typically measures high-speed, ground-referenced signals up to 12 V. The maximum input voltage of 30 V ensures that the probe is not overloaded.


## Exceptionally low offset and gain errors, minimal temperature drift

Rohde & Schwarz single-ended active probes have impressively low offset and gain errors. The minimal gain drift coupled with the offset compensation permits precise measurements – even over extended periods of time and at varying temperatures. Frequent compensation during the measurement is no longer necessary, simplifying everyday measurements.

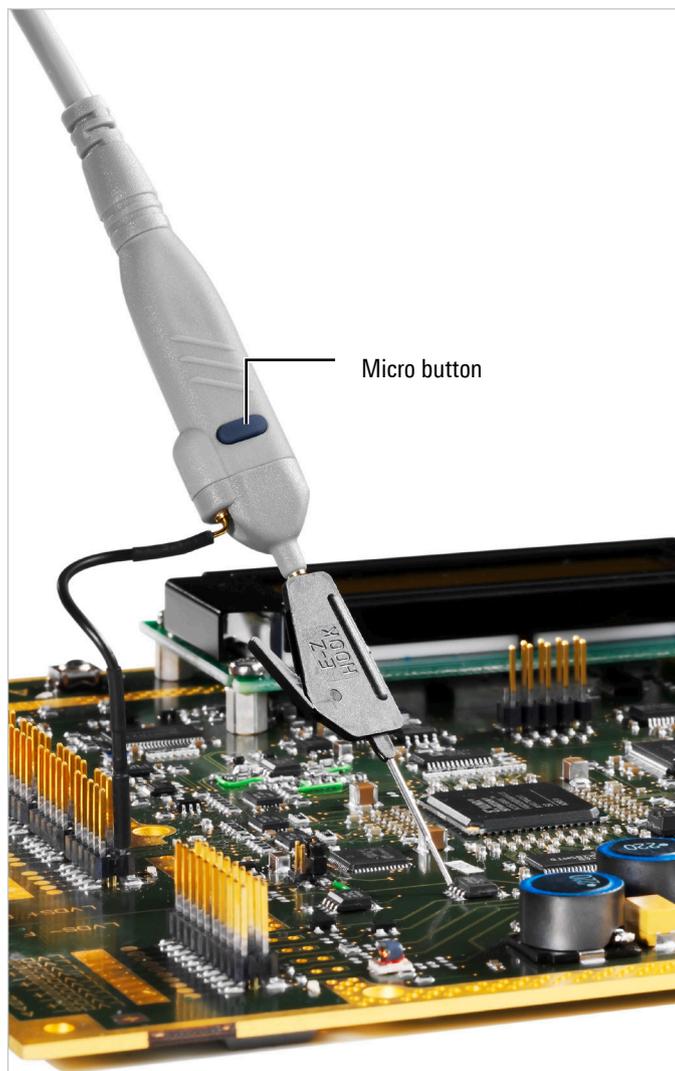

Practical design: micro button for convenient instrument control  
Diverse probe tips and ground cables are included as standard.

## Wide dynamic range: $\pm 8$ V, expandable with additional offset compensation of $\pm 12$ V ( $\pm 10$ V for R&S® RT-ZS60)

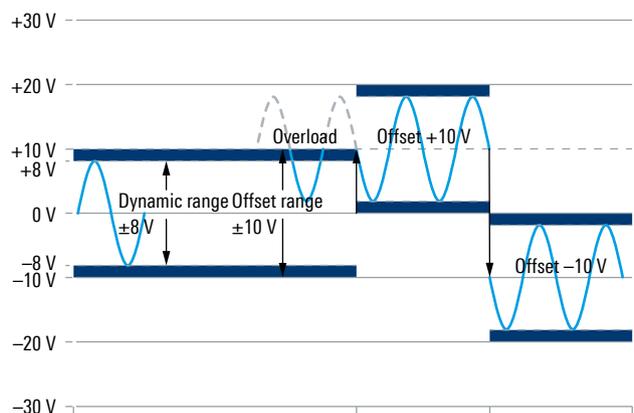

max.  $\pm 30$  V nondestructive input voltage

## Rohde & Schwarz probe interface extension set

When R&S®RT-ZA50 and R&S®RT-ZA51 adapters are combined, they serve as an extension set for the Rohde & Schwarz probe interface. Rohde & Schwarz probes can be operated up to 3 m away from oscilloscopes in production testing and ATE systems.



Extensive standard accessories for R&S®RT-ZS60 single-ended probes

Model	Bandwidth	Attenuation factor	Input impedance	Dynamic range	Comment	Order No.
<b>Probes</b>						
R&S®RT-ZS10E	1.0 GHz	10:1	1 MΩ    0.8 pF	±8 V	Rohde & Schwarz probe interface	1418.7007.02
R&S®RT-ZS10	1.0 GHz	10:1	1 MΩ    0.8 pF	±8 V	R&S®ProbeMeter and micro button for instrument control, Rohde & Schwarz probe interface	1410.4080.02
R&S®RT-ZS20	1.5 GHz	10:1	1 MΩ    0.8 pF	(±12 V offset compensation)		1410.3502.02
R&S®RT-ZS30	3.0 GHz	10:1	1 MΩ    0.8 pF			1410.4309.02
R&S®RT-ZS60	6.0 GHz	10:1	1 MΩ    0.3 pF	±8 V (±10 V offset compensation)		1418.7307.02
<b>Accessories</b>						
R&S®RT-ZA2					accessory set for R&S®RT-ZS10/20E/20/30	1416.0405.02
R&S®RT-ZA3					pin set for R&S®RT-ZS10/10E/20/30	1416.0411.02
R&S®RT-ZA4					mini clips	1416.0428.02
R&S®RT-ZA5					micro clips	1416.0434.02
R&S®RT-ZA6					lead set	1416.0440.02
R&S®RT-ZA9					N(m) adapter for R&S®RT-Zxx oscilloscope probes	1417.0909.02
R&S®RT-ZA50					adapter, Rohde & Schwarz probe interface to 2.92 mm/3.5 mm/SMA	1803.5265.02
R&S®RT-ZA51					adapter, 2.92 mm/3.5 mm/SMA to Rohde & Schwarz probe interface	1803.5365.02


# DIFFERENTIAL BROADBAND PROBES

Flat frequency response and high input impedance with low input capacitance permit precise measurements on differential signals while minimizing the DUT load. The high common mode rejection over the entire probe bandwidth ensures high immunity to interference. Special browser adapters allow flexible contacting with high signal fidelity.

## High common mode rejection


Differential signals are used at high clock rates to effectively suppress common mode interference and transmit error-free broadband signals. The signals can only be measured accurately with differential probes. Common mode rejection is an important quality parameter. Rohde&Schwarz differential probes suppress common mode interference over the entire probe bandwidth.

## High common mode rejection over the entire probe bandwidth (example: R&S®RT-ZD40)

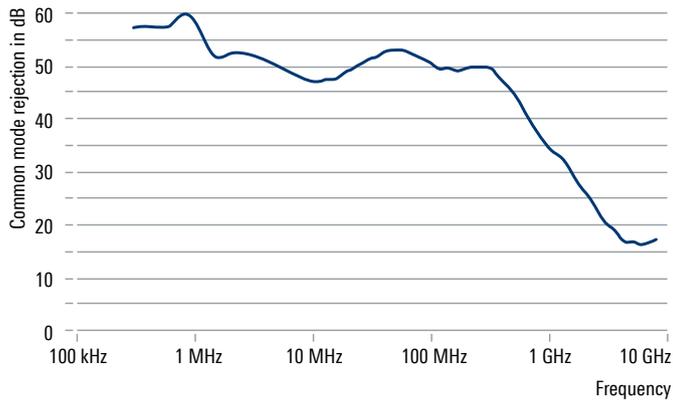

## Low loading at DC and high frequencies

DC voltage needs to differentiate between input impedance for differential and common mode signals, which is particularly important when measuring low voltage differential signaling (LVDS) lines. Although the differential input impedance of LVDS receivers is typically  $100 \Omega$ , the operating point is often set to a high impedance level. Excessive loading on the signal line can shift the operating point outside of the receiver input voltage range and impair the functioning of the circuit. Almost all Rohde&Schwarz differential probes have a very high differential input impedance of  $1 \text{ M}\Omega$  and a common mode impedance of  $250 \text{ k}\Omega$  to keep the load low.

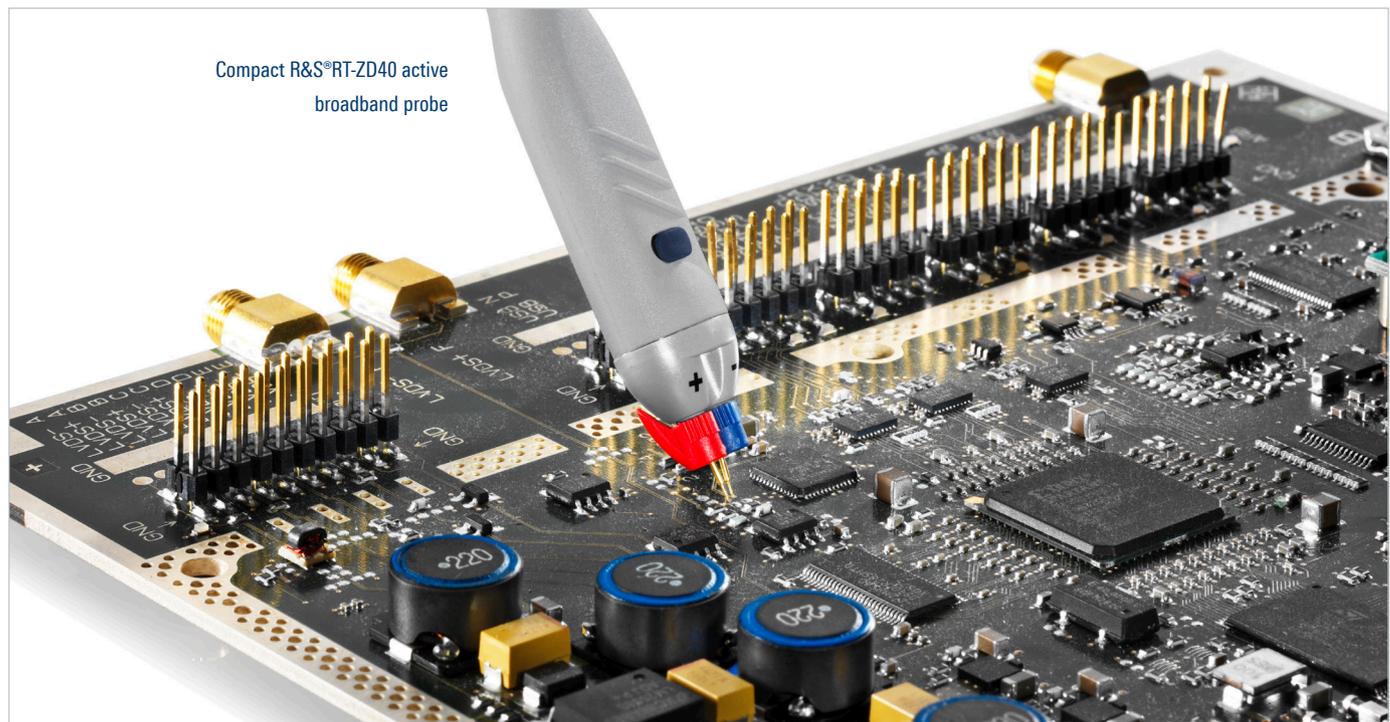

### Wide dynamic range expands the range of applications

The R&S®RT-ZD10/-ZD20/-ZD30/-ZD40 differential broadband probes have a wide dynamic range of  $\pm 5$  V with additional offset compensation of  $\pm 5$  V (differential mode) and  $\pm 22$  V<sup>1)</sup> (common mode), making them universal measurement tools. High-speed, single-ended signals at DDR storage ports can be measured just as easily as symmetrically fed RF signals or voltage without reference to ground in switching power supplies.

The R&S®RT-ZD10 active differential probe, together with the R&S®RT-ZA15 external attenuator (included in delivery) can measure voltage up to  $\pm 60$  V DC/ $\pm 42.4$  V AC (peak) at a bandwidth of 1 GHz.

<sup>1)</sup> This option is available for the R&S®RT-ZD20/-ZD30/-ZD40 starting with serial number 200000.

### Focus on usability

Rohde & Schwarz focuses probe accessory design on usability. The positive and negative inputs are clearly identified. An extensive array of probe tips, easy and precisely adjustable pin offsets and spring-loaded tips for the browser adapters are just some of the special features.



R&S®RT-ZD40: browser adapters to easily vary the pin offset



R&S®RT-ZA15 external attenuator for R&S®RT-ZD20/-ZD30

Model	Bandwidth	Attenuation factor	Input impedance	Dynamic range	Comment	Order No.
<b>Probes</b>						
R&S®RT-ZD10	1 GHz	10:1/ 100:1 <sup>1)</sup>	1 M $\Omega$    0.6 pF/ 1 M $\Omega$    1.3 pF <sup>1)</sup>	$\pm 5$ V, with R&S®RT-ZA15: $\pm 60$ V DC $\pm 42.4$ V AC (peak); offset compensation: $\pm 5$ V (differential mode), $\pm 22$ V <sup>1)</sup> (common mode)	R&S®ProbeMeter and micro button for instrument control; R&S®RT-ZA15 included with R&S®RT-ZD10; Rohde & Schwarz probe interface	1410.4715.02
R&S®RT-ZD20	1.5 GHz	10:1	1 M $\Omega$    0.6 pF			1410.4409.02
R&S®RT-ZD30	3.0 GHz	10:1	1 M $\Omega$    0.6 pF			1410.4609.02
R&S®RT-ZD40	4.5 GHz		1 M $\Omega$    0.4 pF	$\pm 5$ V		1410.5205.02
<b>Accessories</b>						
R&S®RT-ZA4					mini clips	1416.0428.02
R&S®RT-ZA5					micro clips	1416.0434.02
R&S®RT-ZA6					lead set	1416.0440.02
R&S®RT-ZA7					pin set for R&S®RT-ZD10/20/30	1417.0609.02
R&S®RT-ZA8					pin set for R&S®RT-ZD40	1417.0867.02
R&S®RT-ZA15	2 GHz	10:1	1 M $\Omega$    1.3 pF	$\pm 60$ V DC/ $\pm 42.4$ V AC (peak)	external attenuator for R&S®RT-ZD20/30; included with R&S®RT-ZD10	1410.4744.02

<sup>1)</sup> With R&S®RT-ZA15.

# MODULAR BROADBAND PROBES


## High-speed probing challenges

The R&S®RT-ZM modular probe system is a technically sophisticated and easy-to-handle solution for current probing requirements. The systems include a high probing bandwidth and dynamic range together with a low capacitive load. The probe system is available with amplifier module bandwidths from 1.5 GHz to 16 GHz. The modules come with a Rohde & Schwarz probe interface for automatic probe detection and configuration with Rohde & Schwarz oscilloscopes.

The system includes probe tip modules for various measurements and conditions, including semi-permanent solder-in probe tips for small areas or solutions for environmental tests in climatic chambers at temperatures from -55°C to +125°C. The integrated R&S®ProbeMeter function lets multiple high-precision DC voltage measurements be performed at the same time.

## Multimode function


The modular probe system has a unique multimode function that lets users switch between differential, common and single-ended modes. The probe is highly flexible and can be set up for various measurements. You can toggle between the differential and common modes to compare noise and determine the crosstalk noise couples from nearby sources. Being able to shift to single-ended mode lets you access several probe points with one probe tip and is especially useful in DDR setups.

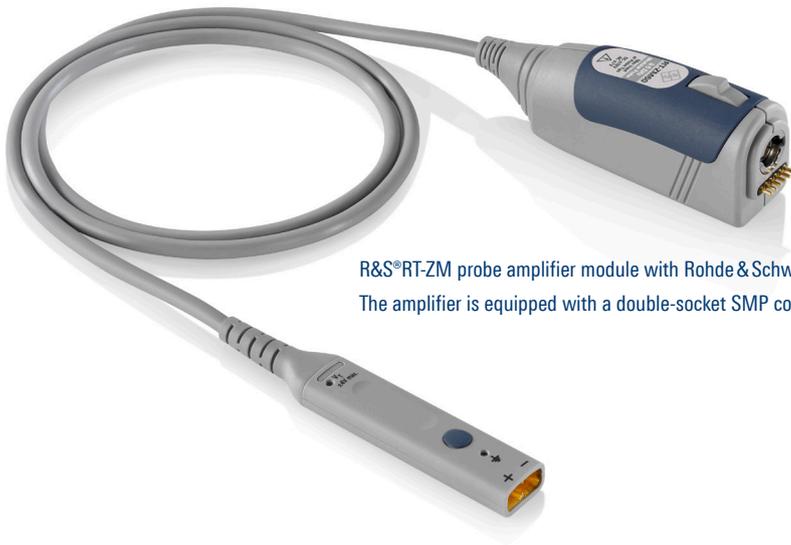

R&S®RT-ZM probe amplifier module with Rohde & Schwarz probe interface  
The amplifier is equipped with a double-socket SMP connector.


## R&S®RT-ZM modular probe system with exchangeable R&S®RT-ZM probe tip module

(connected via a high-performance double-socket SMP snap-on interface to an R&S®RT-ZM probe amplifier module with Rohde & Schwarz probe interface)

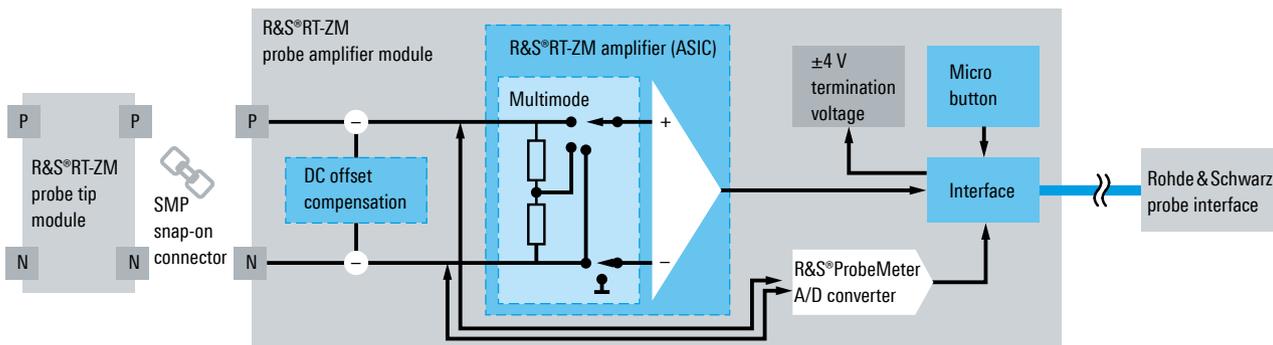

## Probe tip modules for the R&S®RT-ZM modular probe system

► For detailed information, see R&S®RT-ZM flyer PD 3607.5690.32

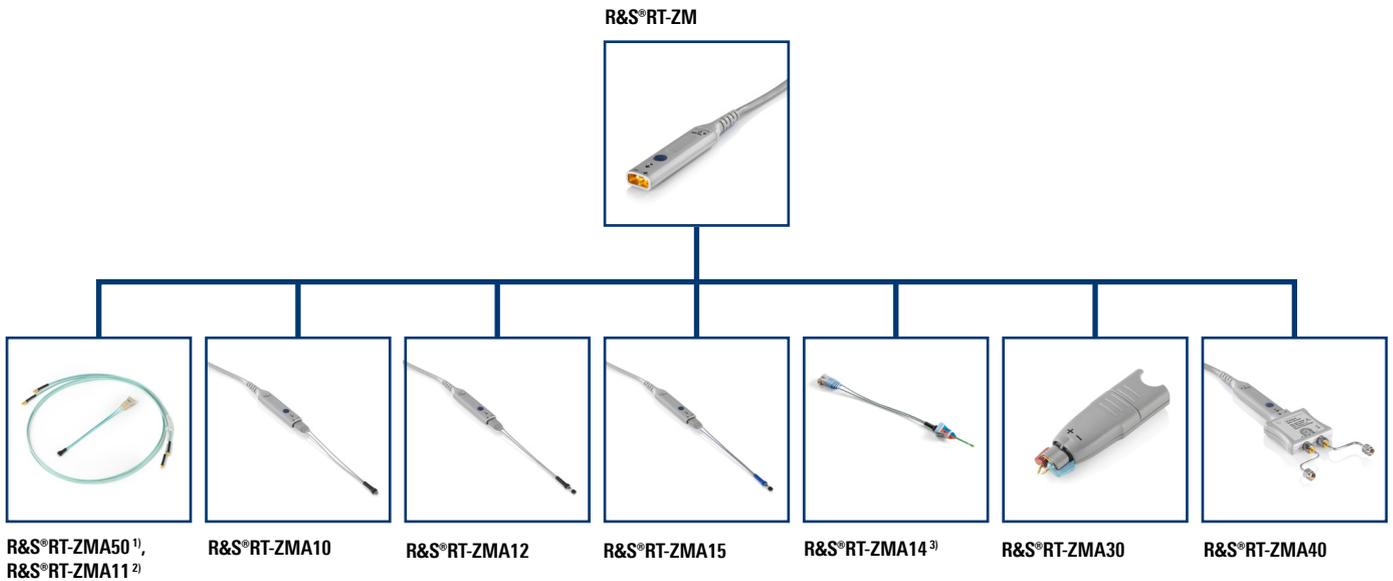

R&S®RT-ZMA50 <sup>1)</sup>,  
R&S®RT-ZMA11 <sup>2)</sup>

R&S®RT-ZMA10

R&S®RT-ZMA12

R&S®RT-ZMA15

R&S®RT-ZMA14 <sup>3)</sup>

R&S®RT-ZMA30

R&S®RT-ZMA40

<sup>1)</sup> Contains the R&S®RT-ZMA11 and a pair of matched extension cables (length: 1 m).

<sup>2)</sup> For the R&S®RT-ZMA50.

<sup>3)</sup> Contains 10 solder-in flex tips.

Model	System bandwidth	Rise time (10% to 90%)	Multimode <sup>1)</sup>	Comment	Order No.
<b>Probe amplifier modules</b>					
R&S®RT-ZM15	> 1.5 GHz	< 230 ps			1800.4700.02
R&S®RT-ZM30	> 3 GHz	< 100 ps			1419.3005.02
R&S®RT-ZM60	> 6 GHz	< 75 ps			1419.3105.02
R&S®RT-ZM90	> 9 GHz	< 50 ps			1419.3205.02
R&S®RT-ZM130	> 13 GHz	< 35 ps			1800.4500.02
R&S®RT-ZM160	16 GHz	< 28 ps			1800.4600.02
<b>Probe tip modules</b>					
R&S®RT-ZMA10	16 GHz (meas.)	28 ps	P/N/DM/CM	length: 15 cm (5.9 in), suitable for R&S®RT-ZMA50	1419.4301.02
R&S®RT-ZMA10-6				set of 6 R&S®RT-ZMA10 solder-in probe tip modules	1801.4349.02
R&S®RT-ZMA11	16 GHz (meas.)	28 ps	P/N/DM/CM	length: 15 cm	1419.4318.02
R&S®RT-ZMA12	6 GHz (meas.)	75 ps	P/N/DM/CM	length: 15 cm	1419.4324.02
R&S®RT-ZMA14	16 GHz (meas.)	28 ps	P/N/DM/CM	length: 15 cm, incl. 10 solder-in flex tips	1338.1010.02
R&S®RT-ZMA15	12 GHz (meas.)	37 ps	P/N/DM/CM	length: 15 cm	1419.4224.02
R&S®RT-ZMA30	16 GHz (meas.)	28 ps	DM		1419.4353.02
R&S®RT-ZMA40	16 GHz (meas.)	28 ps	P/N/DM/CM	50 Ω/100 Ω, suitable for SMA, 3.5 mm and 2.92 mm systems, termination voltage ±4 V, supplied from R&S®RT-ZM probe amplifier module	1419.4201.02
R&S®RT-ZMA50	12 GHz (meas.)	37 ps	P/N/DM/CM	cable length: 1 m; consists of R&S®RT-ZMA11 and a pair of matched extension cables, temperature range: -55°C to +125°C	1419.4218.02
<b>Accessories</b>					
R&S®RT-ZMA1				for up to 6 R&S®RT-ZMAxx probe tip modules	1419.3928.02
R&S®RT-ZAP				3D probe positioner	1326.3641.02
R&S®RT-ZF30				test fixture for probe characterization with R&S®RTP-B7	1333.2099.02

<sup>1)</sup> Multimode:

DM: differential measurement, CM: common mode measurement, P: single-ended measurement on positive pin, N: single-ended measurement on negative pin.

# POWER RAIL PROBE

High bandwidth, high sensitivity, very low noise and extra-large offset compensation make the R&S®RT-ZPR power rail probes ideal for characterizing power rails. An integrated high precision DC voltmeter provides an instant DC voltage readout.

## Up to 4.0 GHz bandwidth and very low added noise

Low voltage with tight tolerance make testing power rails difficult. Not only do newer power rails require more precise low voltage measurements, they are susceptible to coupling with high-speed clocks and RF sources.

The R&S®RT-ZPR power rail probes can provide precise ripple measurements with up to 4.0 GHz of bandwidth, excellent sensitivity thanks to the 1:1 attenuation ratio and low noise. The solution also helps isolate periodic and random disturbances (PARD) when combined with the MXO 4<sup>1)</sup>, MXO 5<sup>1)</sup>, R&S®RTO6 and R&S®RTP, which have the best spectrum analysis in the industry.

<sup>1)</sup> Only with R&S®RT-ZPR20.

## Measuring slight voltage on large DC offsets

The built-in offset is typically not sufficient to zoom in and accurately measure peak-to-peak voltage on DC power rails, making accurate ripple measurements impossible. The  $\pm 60$  V offset compensation range in R&S®RT-ZPR power rail probes lets users zoom in on DC voltage with high offset levels. Whether zooming in on a 1 V power rail or something much higher, the probe has the necessary offset.





# MULTICHANNEL POWER PROBE

Power consumption is a major concern for the internet of things (IoT) and consumer electronics devices. The R&S®RT-ZVC multichannel power probe has up to four voltage and four current channels with 18-bit resolution for high dynamic range current and voltage measurements. When two R&S®RT-ZVC probes are attached to an R&S®RTO6 or R&S®RTP oscilloscope, eight high dynamic range voltage signals and eight high dynamic range current signals can be analyzed in parallel with signals captured by the oscilloscope.

To optimize the battery life for embedded devices, active, sleep, hibernate and current consumption should be balanced. While active current consumption can be up to tens or hundreds of mA, sleep current is often only a few  $\mu\text{A}$ , which can still significantly influence battery life since devices remain mostly in sleep mode.

## Very high dynamic range with 18-bit ADC resolution

With up to four current and four voltage input channels with 18-bit ADC resolution each, the R&S®RT-ZVC02/-ZVC04 multichannel power probe has the dynamic range needed to analyze current consumption in all mobile device activity phases.

## Internal and external shunt current measurement with switchable sensitivity

Three built-in shunts and an external shunt mode in combination with switchable gain factors helps optimize the input current range. Differential inputs provide floating measurements within an input voltage operating window of  $\pm 15\text{ V}$ . Settings are fully controlled from the oscilloscope user interface.



## High bandwidth with flexible filtering for noise reduction


A bandwidth of 1 MHz and a sampling rate of 5 Msample/s can capture fast current pulses. To analyze overall power consumption for battery powered devices, the very low sleep mode currents have to be captured simultaneously. The integrated lowpass filter reduces the bandwidth to 5 kHz and minimizes overall system noise for very high dynamic range measurements.

## Precisely measure up to eight power rails at the same time

One R&S®RTO6 or R&S®RTP oscilloscope supports up to two R&S®RT-ZVC probes allowing eight power domains to be observed in parallel with a DC accuracy of 0.1% for voltage measurements and 0.2% for current measurements. Ramp-up processes and power rail tolerances can easily be tested with the probe. The SCPI remote control in the oscilloscope enables automatic testing.

## Digital acquisition system

The R&S®RT-ZVC probe's digital acquisition system provides 18-bit resolution, a 5 Msample/s sampling rate and 1 MHz bandwidth. Each voltage and current input pair forms a high dynamic range power measurement system.

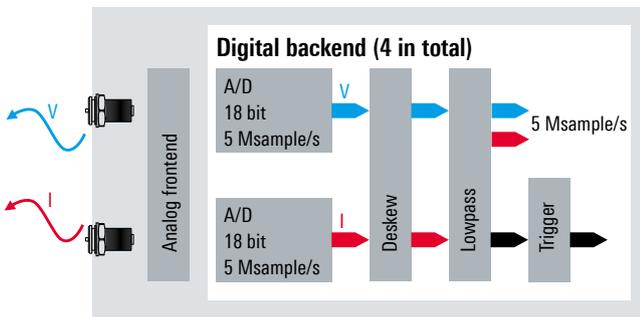

### Current ranges

#### Low-gain mode, shunt

±4.5  $\mu$ A; ±45  $\mu$ A, 10 k $\Omega$   
 ±4.5 mA; ±45 mA, 10  $\Omega$   
 ±4.5 A; ±10 A, 10 m $\Omega$   
 ±45 mV<sup>1)</sup>; ±450 mV<sup>1)</sup>; external

### Voltage ranges

±1.88 V  
 ±3.75 V  
 ±7.5 V  
 ±15 V

<sup>1)</sup> Current range depends on shunt value.



The R&S®RT-ZVC probe provides an extraordinarily high dynamic range for measuring both active state currents and sleep currents, in this example 12 mA and 30  $\mu$ A. Automated measurements make it possible to calculate the total energy consumption.

### Very low-noise frontend for measuring sensor signals

The extraordinarily high dynamic range and low-noise of the R&S®RT-ZVC probe enables clear measurement of slight sensor signals. Maximum sensitivity can be achieved by using the current inputs in external shunt mode which results in 18-bit resolution at 45 mV full-scale differential input voltage. A cardiac voltage pulse with a signal level of only 200  $\mu$ V (peak-to-peak) can easily be captured and analyzed.

### Flexible connectivity options for every application


The R&S®RT-ZVC multichannel power probe comes with a set of high-quality pin connector cables and solder-in leads to connect the probe in typical embedded electronics measurement scenarios. 4 mm connector cables with different lengths are optionally available as are BNC type connector cables for connecting standard oscilloscope voltage and current probes to extend the voltage and current measurement range.



Small signals such as a 200  $\mu$ V cardiac pulse can easily be measured.



Standard accessories include PCB connector cables for each channel and solder-in leads.

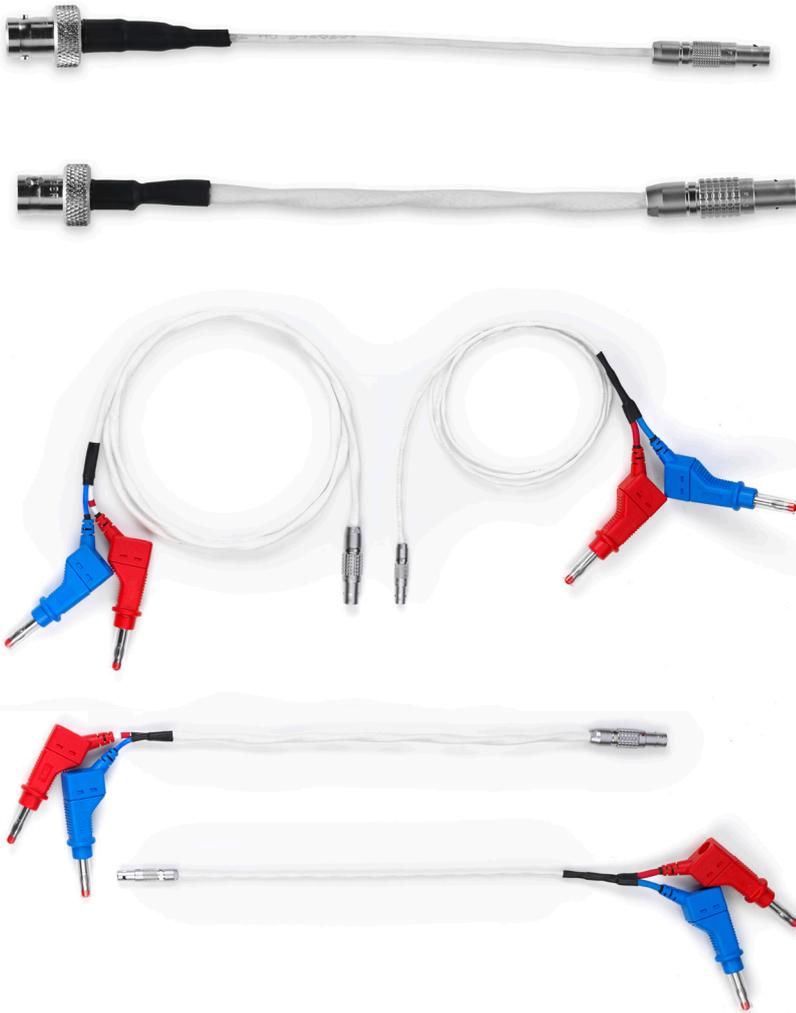

4 mm cables with different lengths and BNC connector cables are optionally available.

Model	Input channels	Bandwidth/sampling rate	Resolution	Input impedance	Full-scale input range	Common mode input voltage range	Order No.
R&S®RT-ZVC02	2 current, 2 voltage	1 MHz/5 Msample/s	18 bit		▶ voltage ±1.88/±3.75/±7.5/±15 V	±15 V	1326.0259.02
R&S®RT-ZVC04	4 current, 4 voltage	1 MHz/5 Msample/s	18 bit	▶ voltage channels: 10 MΩ    48 pF ▶ current channels: 1 MΩ    shunt resistor	▶ current - internal shunt 10 kΩ: ±4.5 μA, ±45 μA, 10 Ω: ±4.5 m, ±45 mA, 10 mΩ: ±4.5 A, ±10 A - external shunt (voltage range) ±45 mV, ±450 mV (all channels)	±15 V	1326.0259.04

Accessories	Comment	Order No.
R&S®RT-ZA30	extended cable set for R&S®RT-ZVC, PCB probing, 1 current and 1 voltage lead, length: 32 cm	1333.1686.02
R&S®RT-ZA31	extended cable set for R&S®RT-ZVC, 4 mm probing, 1 current and 1 voltage lead, length: 32 cm	1333.1692.02
R&S®RT-ZA33	oscilloscope interface cable for R&S®RT-ZVC (included with R&S®RT-ZVC02/-ZVC04, 1326.0259.02/.04)	1333.1770.02
R&S®RT-ZA34	extended cable set for R&S®RT-ZVC, 4 mm probing, 1 current and 1 voltage lead, length: 1 m	1333.1892.02
R&S®RT-ZA35	extended cable set for R&S®RT-ZVC, PCB probing, 1 current and 1 voltage lead, length: 1 m	1333.1905.02
R&S®RT-ZA36	solder-in cable set for R&S®RT-ZVC, 4 current and voltage solder-in cables, solder-in pins	1333.1911.02
R&S®RT-ZA37	extended cable set for R&S®RT-ZVC, BNC connector, 1 current and 1 voltage lead, length: 16 cm	1337.9130.02
R&S®RTP-B1E	digital extension port for R&S®RT-ZVC usage with the R&S®RTP oscilloscope (included with R&S®RTP-B1)	1337.9581.02
R&S®RTO6-B1E	digital extension port for R&S®RT-ZVC usage with the R&S®RTO6 oscilloscope (included with R&S®RTO6-B1)	1801.6735.02

# HIGH VOLTAGE PROBES

The Rohde & Schwarz high voltage probe portfolio includes passive single-ended and active differential probes for up to 6000 V (peak). Different models can be used for measurements in CAT IV environments. Differential probes have an exceptional common mode rejection ratio over a broad frequency range.


## 200 MHz bandwidth combined with excellent CMRR

To achieve the greatest power efficiency and power density in switched-mode power supplies, switching loss has to be minimized, which requires modern, fast-switching semiconductors.

With up to 200 MHz bandwidth and an excellent common mode rejection ratio (CMRR) over a broad frequency range, R&S®RT-ZHD high voltage differential probes are ideal for measurements on fast-switching semiconductors. Extraordinarily low added noise results in high-quality measurements.

## Highest precision measurements

R&S®RT-ZHD probes provide the best available precision in their class with 0.5% ensured gain accuracy in the signal path and a DC voltmeter (R&S®ProbeMeter) with 0.1% accuracy integrated into the probe head. Very low drift makes regular calibration during measurements unnecessary.

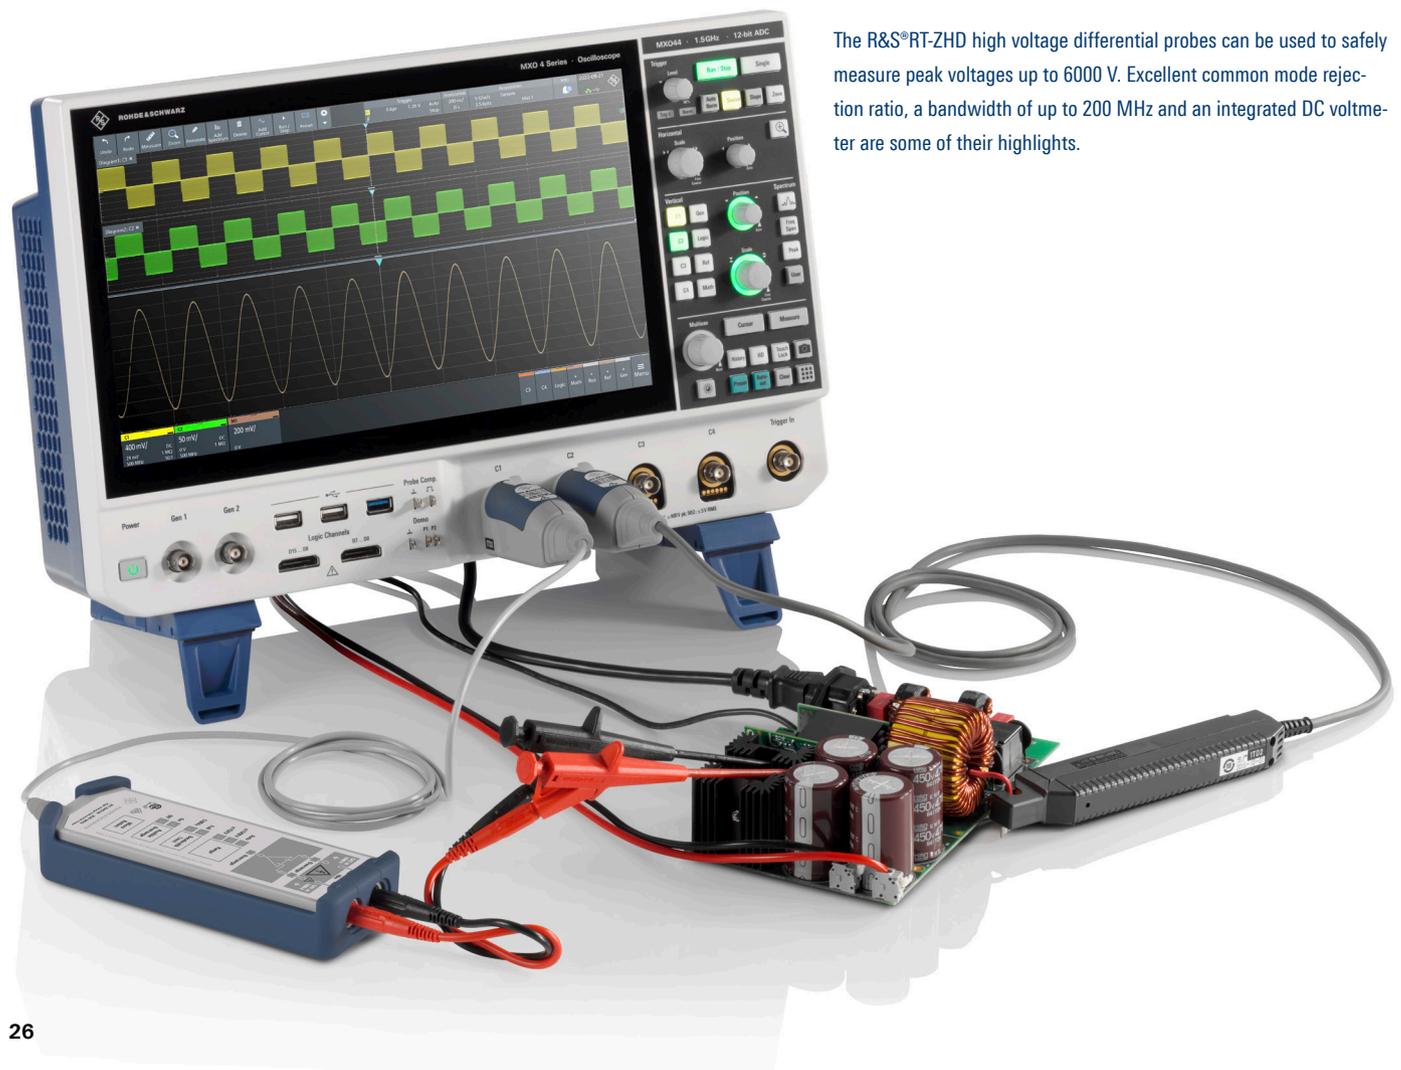

The R&S®RT-ZHD high voltage differential probes can be used to safely measure peak voltages up to 6000 V. Excellent common mode rejection ratio, a bandwidth of up to 200 MHz and an integrated DC voltmeter are some of their highlights.

### Up to 2000 V offset capability at highest vertical sensitivity

To measure ripple voltage on the DC link, high offset voltage needs to be offset and measured with high vertical sensitivity. The integrated offset circuit lets R&S®RT-ZHD probes have an offset voltage range independent of the vertical oscilloscope settings and the probe attenuation factor. Now you can measure the slightest ripple voltage for high DC link voltage levels without compromising sensitivity.

### Easy to use and fully integrated into Rohde & Schwarz oscilloscopes


An integrated, switchable, 5 MHz analog filter, an audible overrange indicator that reveals common mode voltage overrange situations and automatic range switching make the probe easy to use. The integrated micro button allows you to control the oscilloscope from the probe.

Fully integrated into the oscilloscope, the probe can be remote controlled for automatic testing and does not require an external power supply.



Rich set of standard accessories for the R&S®RT-ZHD high voltage differential probes

## Maximum pulse peak voltage as a function of the RMS voltage

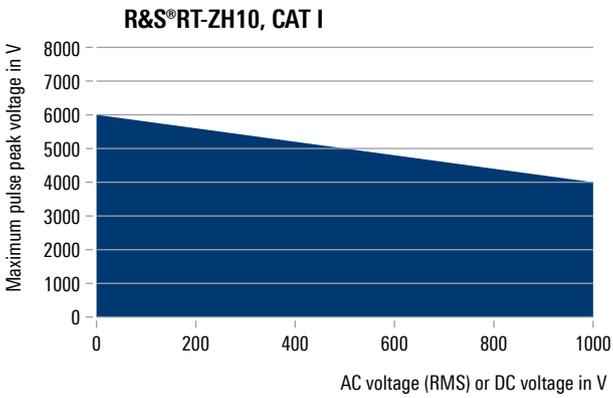

## Single-ended passive probes for up to 1000 V (RMS) and 6000 V (peak)

If differential measurements are not required, single-ended passive probes are a powerful, cost-effective solution. R&S®RT-ZH10 and R&S®RT-ZH11 passive high voltage probes have up to 400 MHz of bandwidth and attenuation factors of 100:1 and 1000:1.

Both probes are designed for RMS voltage levels up to 1000 V (CAT II) and – when used exclusively for pulse measurements – for peak voltage levels up to 6000 V (CAT I). Accessories include safety alligator clips, rigid and spring-loaded tips and protection caps.




The R&S®RT-ZH03 passive high voltage probe has a robust 5 mm probe tip and is the perfect choice if 250 MHz bandwidth is sufficient.



The R&S®RT-ZH10 and R&S®RT-ZH11 passive high voltage probes provide 400 MHz bandwidth and a spring-loaded 5 mm tip.

## Overview of measurement categories CAT I through CAT IV

The probe design determines its area of application and the maximum rated voltage against protective ground.

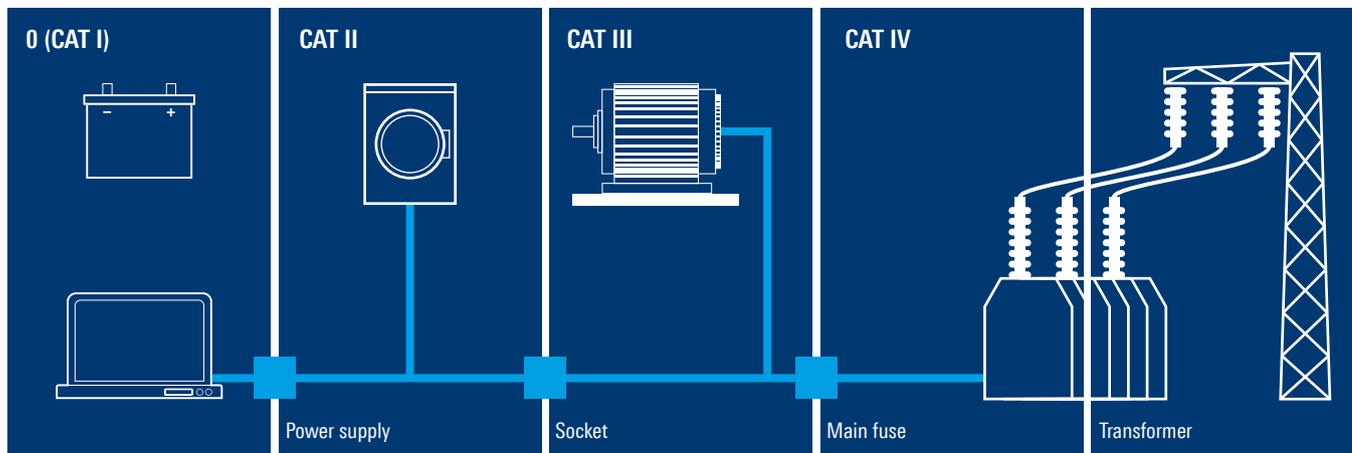


## Measuring voltages up to 1000 V (RMS) with 500 MHz bandwidth

Measuring in high voltage environments requires special safety precautions in line with the European Low Voltage Directive that depend on the actual measurement environment.

R&S®RT-ZI11 passive probes can be used to measure fast switching edges of GaN power electronics designs with 500 MHz of bandwidth. Designed for the R&S®ScopeRider RTH oscilloscope with its isolated channels, the probes are ideal for floating measurements of voltages with common mode voltages up to 1000 V (RMS).

The R&S®ScopeRider RTH lets you safely measure voltages up to 1000 V in CAT III environments or 600 V in CAT IV environments. In combination with the R&S®RT-ZI11 100:1 passive high voltage probe, a bandwidth of 500 MHz is achieved. This makes the solution interesting for measurements on GaN based power electronics components.

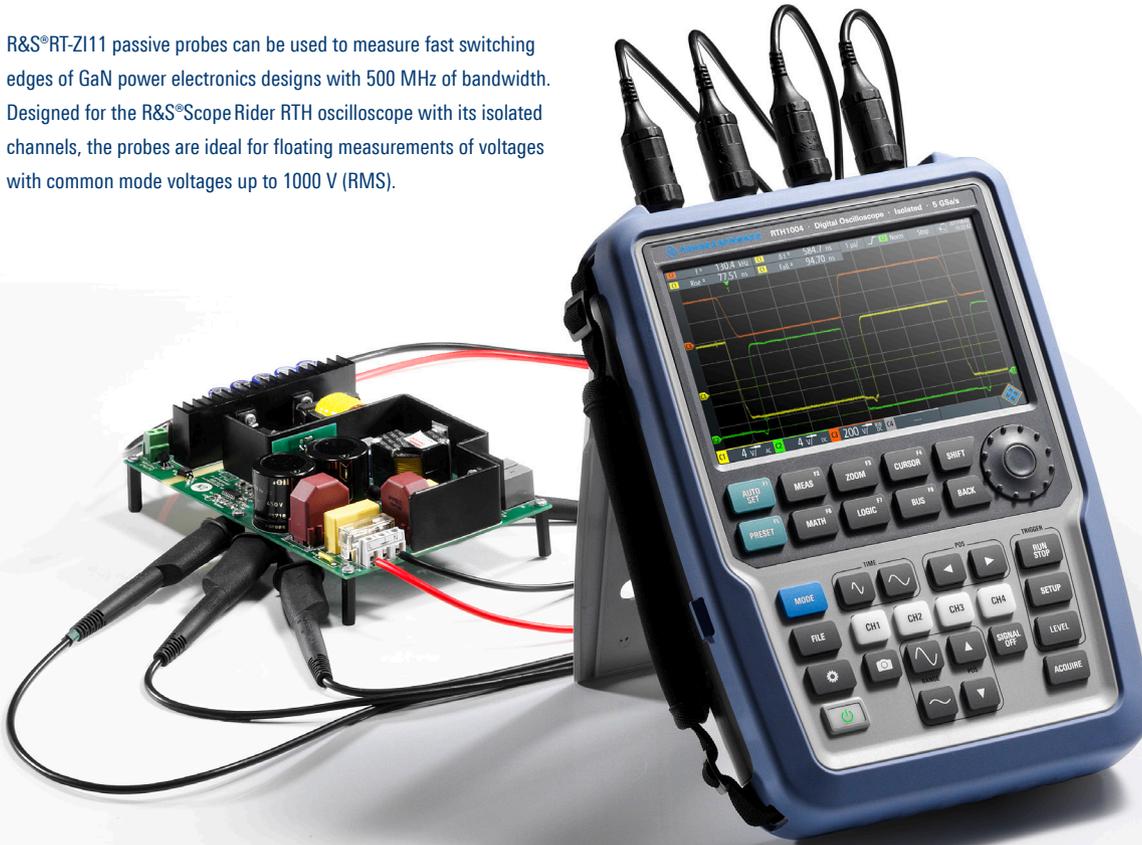

Model	Bandwidth	Attenuation factor	Input impedance	Dynamic range	Comment	Order No.
<b>Passive probes</b>						
R&S®RT-ZH03	250 MHz	100:1	100 M $\Omega$    6.5 pF	850 V (RMS)	robust 5 mm probe tip	1333.0873.02
R&S®RT-ZH10	400 MHz	100:1	50 M $\Omega$    7.5 pF	1000 V (RMS), 6000 V (peak)	1000 V (RMS) CAT II, 5 mm probe tip, spring-loaded	1409.7720.02
R&S®RT-ZH11	400 MHz	1000:1	50 M $\Omega$    7.5 pF	1000 V (RMS), 6000 V (peak)	1000 V (RMS) CAT II, 5 mm probe tip, spring-loaded	1409.7737.02
R&S®RT-ZI11	500 MHz	100:1	100 M $\Omega$    4.6 pF	1000 V (RMS)	600 V (RMS) CAT IV, 1000 V (RMS) CAT III, 3540 V (RMS) CAT 0, for R&S®ScopeRider RTH only	1326.1810.02
<b>Active, differential probes</b>						
R&S®RT-ZHD07	200 MHz	25:1/250:1	5 M $\Omega$    2.5 pF	$\pm$ 750 V	300 V (RMS) CAT III	1800.2307.02
R&S®RT-ZHD15	100 MHz	50:1/500:1	10 M $\Omega$    2 pF	$\pm$ 1500 V	1000 V (RMS) CAT III	1800.2107.02
R&S®RT-ZHD16	200 MHz	50:1/500:1	10 M $\Omega$    2 pF	$\pm$ 1500 V	1000 V (RMS) CAT III	1800.2207.02
R&S®RT-ZHD60	100 MHz	100:1/1000:1	40 M $\Omega$    2 pF	$\pm$ 6000 V	1000 V (RMS) CAT III	1800.2007.02
<b>Accessory</b>						
R&S®RT-ZA24					replacement kit for R&S®RT-ZHD probes	1800.2707.00


# OPTICALLY ISOLATED PROBES

Rohde & Schwarz has expanded its portfolio for high and fast CM signals with the R&S®RT-ZISO isolated probing system for WBG and faster IGBT switch node testing applications. Many different models allow measurements up to 3000 V in CAT III environments. R&S®RT-ZISO probes have a large common mode rejection ratio (CMRR) over a wide frequency range.

The R&S®RT-ZISO isolated probing system addresses several measurement challenges faced by engineers who work on high power and fast switching systems, particularly those that use the wide bandgap technology. Gallium nitride (GaN) and silicon carbide (SiC) power devices are gaining market share to replace older silicon MOSFET and IGBT devices for higher power efficiency and density.

To reduce common noise loops, a break with ground connections is needed. The R&S®RT-ZISO uses lasers to communicate between the probe head and the probe receiver to limit the potential electrical return path for common mode signals. The probe tip and probe head are essentially floating and measurements are optically transmitted to the probe receiver. Even when the instrument and DUT can be connected on the same ground plane, not having an electrical path completely isolates the common mode loops.

## Isolation with optical fiber

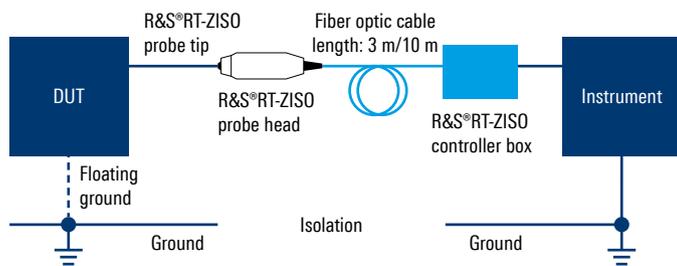


## CMRR performance (meas.)


DC	145 dB
1 MHz	145 dB
100 MHz	110 dB
200 MHz	100 dB
500 MHz	100 dB
1 GHz	90 dB



Using the R&S®RT-ZISO with Rohde&Schwarz probe interfaces on an oscilloscope creates a seamless probe system. When connected to a Rohde&Schwarz oscilloscope, the instrument captures and sets up probe tip information to match the attenuation and range on the receiver. Offset and range control can be easily configured on the instrument. The Rohde&Schwarz interface also delivers power directly to the probe system. Setting up the R&S®RT-ZISO with a Rohde&Schwarz oscilloscope ensures the correct settings for your measurement. Rohde&Schwarz oscilloscopes can use the probe with the fastest waveform acquisition capability in the world, highest 18-bit HD resolution and includes features such as zone trigger and fast spectrum for quick design insights.

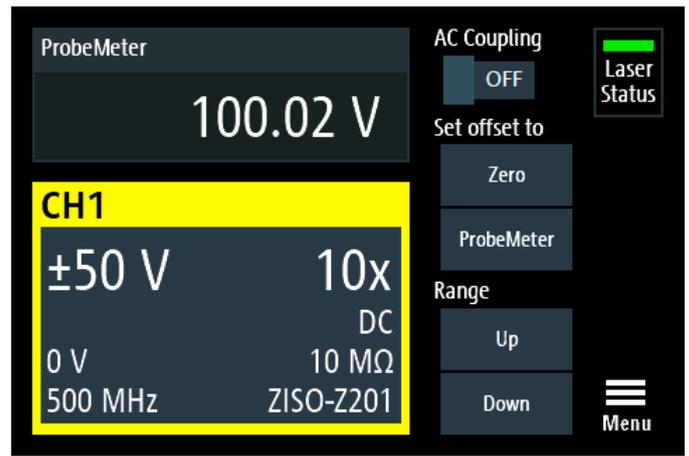

The R&S®RT-ZISO isolated probing system lets you connect to any oscilloscope with a BNC or SMA interface. The probe receiver comes with a touchscreen display to control and view probe system settings, for easier control of the probe range and offset settings while also showing the connected probe tip.

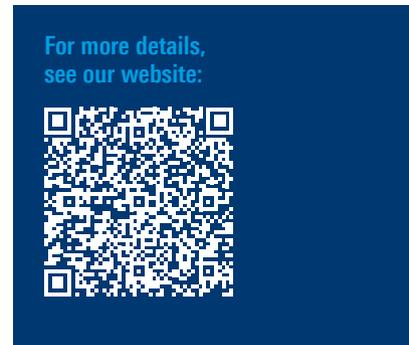

Model	Bandwidth	Attenuation factor	Input impedance	Dynamic range	Comment	Order No.
<b>Probe configuration, base model</b>						
R&S®RT-ZISO	up to 1 GHz	defined by probe tip		defined by probe tip	different probe tips MMCX, square pin TIP, wide square pin TIP, handheld browser TIP	1804.5000.02
<b>Choose your cable length</b>						
R&S®ZISO-B403					3 m optical fiber cable	1804.5017.02
R&S®ZISO-B410					10 m optical fiber cable	1804.5023.02
<b>Choose your system bandwidth</b>						
R&S®ZISO-B901					100 MHz option	1804.5030.02
R&S®ZISO-B902					200 MHz option	1804.5046.02
R&S®ZISO-B903					350 MHz option	1804.5052.02
R&S®ZISO-B905					500 MHz option	1804.5069.02
R&S®ZISO-B910					1 GHz option	1804.5075.02
<b>Choose your probe tips</b>						
R&S®ZISO-Z101	1 GHz	1.5x	50 Ω	8 V (RMS), ±45 V (peak)	MMCX tip module, 1 kV (RMS) CAT III	1803.4100.02
R&S®ZISO-Z201	1 GHz	10x	10 MΩ    3.7 pF	±300 V (peak)	MMCX tip module, 1 kV (RMS) CAT III	1803.4200.02
R&S®ZISO-Z202	1 GHz	25x	10 MΩ    3.5 pF	±300 V (peak)	SQPIN tip module, 1 kV (RMS) CAT III	1803.4300.02
R&S®ZISO-Z203	1 GHz	100x	40 MΩ    3.2 pF	±3 kV (peak)	WSQPIN tip module, 1 kV (RMS) CAT III	1803.4400.02
R&S®ZISO-Z301	500 MHz	10x	10 MΩ    11 pF	±300 V (peak)	browser tip module, 300 V (RMS) CAT III	1803.4500.02
R&S®ZISO-Z302	500 MHz	100x	100 MΩ    4.6 pF	±3 kV (peak)	browser, 1 kV (RMS) CAT III	1803.4600.02

# CURRENT PROBES

Rohde & Schwarz current probes enable accurate, non-intrusive measurement of DC and AC current levels. Different models can measure current in the 1 mA to 2000 A range with up to 120 MHz of bandwidth.

## DC and AC measurements without circuit interruption

The R&S®RT-ZC current probes precisely measure direct and alternating current levels without interrupting the power circuit during measurement. The extra-large opening on the R&S®RT-ZC10 can accommodate conductors with a diameter of up to 20 mm. The R&S®RT-ZC10 can measure peak currents up to 300 A (500 A for a single pulse). The more compact R&S®RT-ZC20 with a measurement bandwidth of 100 MHz is ideal when measuring low-amplitude, high-frequency currents.

The R&S®RT-ZC31 can switch between three different sensitivity ranges to cover a very broad dynamic range with high bandwidth.

## Robust design and easy operation

Rohde & Schwarz current probes have a robust design and are easy to operate. The degauss and offset correction can be done directly at the probe connector. The compact R&S®RT-ZA13 probe power supply supplies up to four current probes. The current probes can be selected as pre-defined probes on R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5 and R&S®RTO6 oscilloscopes.



R&S®RT-ZC20B current probe with Rohde & Schwarz probe interface (100 MHz, 30 A (RMS))



External power supply for up to four current probes

## Easy deskewing for simultaneous current and voltage measurements

Meaningful measurements on power electronics must have no time delay (skew) between the current and voltage measurements. The R&S®RT-ZF20 power deskew and calibration test fixture has a variety of test signals to easily compensate for skew between Rohde&Schwarz current and voltage probes. The oscilloscope USB port supplies power to the power deskew and calibration test fixture.



R&S®RT-ZF20 power deskew and calibration test fixture:  
Easy deskewing for measurements on power electronics.


Model	Bandwidth	Sensitivity	Dynamic range	Rise time	Comment	Order No.
<b>Probes</b>						
R&S®RT-ZC02	20 kHz	0.01 V/A, 0.001 V/A	±200 A, ±2000 A	5 µs	battery powered	1333.0850.02
R&S®RT-ZC03	100 kHz	0.1 V/A	20 A (RMS), ±30 A (peak)	1 µs	battery powered	1333.0844.02
R&S®RT-ZC05B	2 MHz	0.01 V/A	500 A (RMS), 700 A (peak)	175 ns	power supply via Rohde&Schwarz probe interface	1409.8204.02
R&S®RT-ZC10	10 MHz	0.01 V/A	150 A (RMS), ±300 A (peak), ±500 A (peak) (single pulse)	35 ns	power supply via R&S®RT-ZA13	1409.7750K02
R&S®RT-ZC10B	10 MHz	0.01 V/A		35 ns	power supply via Rohde&Schwarz probe interface	1409.8210.02
R&S®RT-ZC15B	50 MHz	0.1 V/A		7 ns	power supply via Rohde&Schwarz probe interface	1409.8227.02
R&S®RT-ZC20	100 MHz	0.1 V/A	30 A (RMS), ±50 A (peak)	3.5 ns	power supply via R&S®RT-ZA13	1409.7766K02
R&S®RT-ZC20B	100 MHz	0.1 V/A		3.5 ns	power supply via Rohde&Schwarz probe interface	1409.8233.02
R&S®RT-ZC30	120 MHz	1 V/A	5 A (RMS), 7.5 A (peak)	2.9 ns	power supply via R&S®RT-ZA13	1409.7772K02
R&S®RT-ZC31	120 MHz	0.1 V/A, 1 V/A, 10 V/A	30 A (RMS), 5 A (RMS), 0.5 A (RMS)	2.9 ns	power supply via R&S®RT-ZA13	1801.4932K02
<b>Accessories</b>						
R&S®RT-ZF20					power deskew and calibration test fixture	1800.0004.02
R&S®RT-ZA13					external power supply for up to four Rohde&Schwarz current probes	1409.7789.02

# EMC NEAR-FIELD PROBES

Powerful E and H near-field probes for the 30 MHz to 3 GHz frequency range with optional preamplifier expand the R&S®RTM3000, R&S®RTA4000, MXO 4, MXO 5, R&S®RTO6 and R&S®RTP oscilloscope application range to include EMI debugging.

## Powerful FFT analysis function in R&S®RTO6 oscilloscope

The powerful FFT function in the R&S®RTO6 oscilloscope now enables EMI debugging with an oscilloscope. Developers now have a cost-effective solution for EMI debugging right on their lab bench. Unwanted EMI can be displayed simultaneously in both the time and frequency domains to speed up debugging.

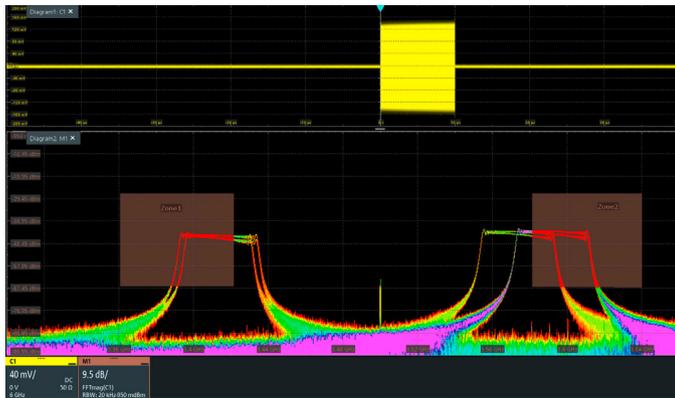


Direct acquisition and analysis of sporadically occurring EMI thanks to the R&S®RTO6 oscilloscope's powerful spectrum analysis function

## Versatile near-field probe sets

Near-field probes can analyze EMC problems in electronic circuits and identify their causes. Rohde&Schwarz has several near-field probe sets that include E-field and H-field probes for use with oscilloscopes, signal and spectrum analyzers and EMI test receivers.

The R&S®HZ-15 E and H near-field probe set consists of several passive near-field probes that are ideal for diagnosing EMC problems on printed circuit boards. The compact design help find sources of EMI, even in individual conductors. The optional R&S®HZ-16 preamplifier has 20 dB gain for greater sensitivity in the 100 kHz to 3 GHz frequency range.

The R&S®HZ-17 H-field probe set is an economical near-field set for EMI debugging when E field measurements are not required.

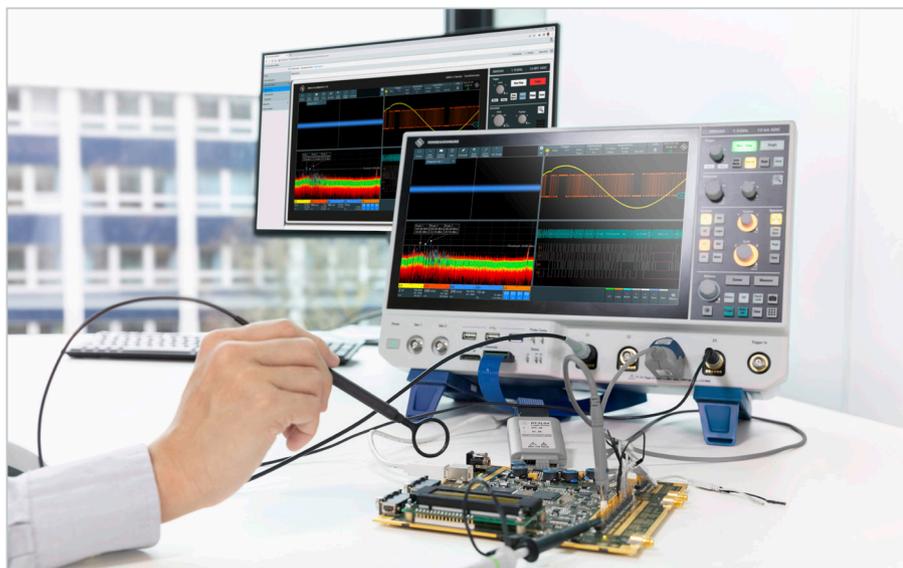

## EMI debugging and power measurement with the MXO 4

Model	Frequency range	Comment	Order No.
<b>Near-field probe</b>			
R&S®HZ-15	30 MHz to 3 GHz	compact E and H near-field probe set	1147.2736.02
R&S®HZ-17	30 MHz to 3 GHz	compact H near-field probe set	1339.4141.02
<b>Accessory</b>			
R&S®HZ-16	100 kHz to 3 GHz	3 GHz, 20 dB, preamplifier 100 V to 230 V power adapter	1147.2720.02

# ACCESSORIES

## Probe interface adapter

The R&S®RT-Z2T probe interface adapter lets certain Tektronix TekProbe interface level II probes be used with Rohde&Schwarz oscilloscopes. Tektronix active probes can be used with the TekProbe-BNC interfaces on Rohde&Schwarz oscilloscopes, for convenient and straightforward access to a broad range of active, current, differential, high voltage and electro-optical probes.

## Support of the following Tektronix probes

Type	Model
<b>Single-ended active probes</b> (without offset control)	<ul style="list-style-type: none"> <li>▶ P6205: 750 MHz, 10:1</li> <li>▶ P6243: 1 GHz, 10:1</li> <li>▶ P6245: 1.5 GHz, 10:1</li> <li>▶ P6241: 4 GHz, 10:1</li> <li>▶ P6249: 4 GHz, 5:1</li> </ul>
<b>Current probes</b>	TCP202: 50 MHz AC/DC current probe
<b>Differential active probes</b> (without offset control)	<ul style="list-style-type: none"> <li>▶ P6246: 400 MHz, 10:1/1:1</li> <li>▶ P6247: 1 GHz, 10:1/1:1</li> <li>▶ P6248: 1.5 GHz, 10:1/1:1</li> <li>▶ P6250: 500 MHz, 50:1/5:1</li> <li>▶ P6251: 1 GHz, 50:1/5:1</li> </ul>
<b>High voltage differential probes</b>	<ul style="list-style-type: none"> <li>▶ P5205: 100 MHz, 50:1/500:1</li> <li>▶ P5210: 50 MHz, 100:1/1000:1</li> </ul>
<b>Electro-optical probes</b>	<ul style="list-style-type: none"> <li>▶ P6701B: 1 GHz</li> <li>▶ P6703B: 1.2 GHz</li> <li>▶ P6711: 250 MHz</li> <li>▶ P6713: 300 MHz</li> </ul>



R&S®RT-Z2T probe interface adapter


The R&S®RT-Z2T probe interface adapter allows you to connect TekProbe-BNC level II probes to the following Rohde&Schwarz oscilloscopes:

- ▶ R&S®RTM3000
- ▶ R&S®RTA4000
- ▶ R&S®RTE1000 (discontinued)
- ▶ R&S®RTO2000 (discontinued)
- ▶ R&S®RTO6
- ▶ MXO 5

## Probe positioners

The R&S®RT-ZA29 probe positioner with two legs lets three different probe diameters be used and the probe tip can be precisely placed at a contact spot as needed. The R&S®RT-ZAP 3D probe positioner offers precise and flexible probe positioning for advanced electronic testing. Engineers can accurately and flexibly place probes at different angles and orientations and have easy access to desired probe points on complex circuits and components. The high-precision mechanics help the R&S®RT-ZAP streamline measurement workflows, reduce setup times and improve measurement reliability. The positioner is vital asset for any modern electronics laboratory.

TEKTRONIX, TEK, and TEKPROBE are registered trademarks of Tektronix, Inc.

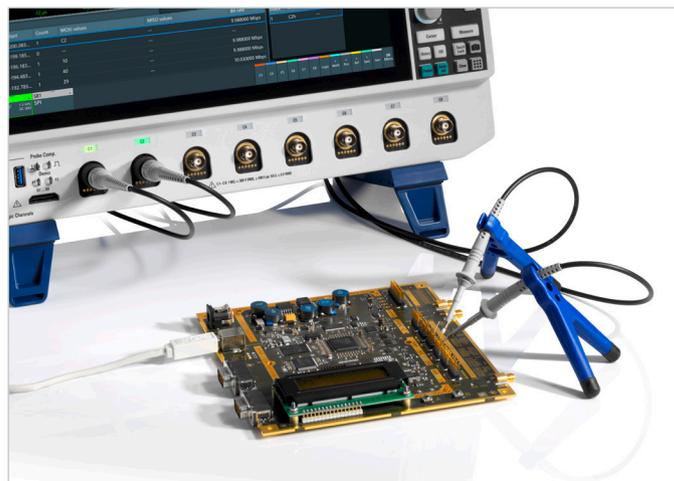

R&S®RT-ZA29 probe positioner with two legs

Model	Comment	Order No.
R&S®RT-Z2T	probe interface adapter, for selected Tektronix probes with TekProbe-BNC level II interface	1338.0007.02
R&S®RT-ZA29	probe positioner, 2 legs	1801.4803.02
R&S®RT-ZAP	3D probe positioner	1326.3641.02

## External frontends

The different R&S®FExx external frontend models are a convenient way to extend the usable frequency of R&S®RTP oscilloscopes up to 170 GHz. The frontends come fully calibrated with built-in high performance local oscillators for top signal quality. It is an easy-to-use, complete and compact solution.



R&S®RT-ZAP 3D probe positioner in use with the R&S®RT-ZD30

The R&S®RTP oscilloscope controls the external frontends via LAN interface. With the R&S®RTP-K553 external frontend control option, setup and control is completely integrated in the oscilloscope user interface. The R&S®RTP also corrects the frequency and phase response of the external frontends, based on the individual characteristics stored in the EEPROM external frontends.

### Recommended products

External frontends	<ul style="list-style-type: none"> <li>▶ R&amp;S®FE44S, 24 GHz to 44 GHz</li> <li>▶ R&amp;S®FE50DTR, 36 GHz to 50 GHz</li> <li>▶ R&amp;S®FE110SR, 70 GHz to 110 GHz</li> <li>▶ R&amp;S®FE170SR, 110 GHz to 170 GHz</li> </ul>
Oscilloscope and options	<ul style="list-style-type: none"> <li>▶ R&amp;S®RTP164B high-performance oscilloscope, 16 GHz</li> <li>▶ R&amp;S®RTP-K11 I/Q software interface</li> <li>▶ R&amp;S®RTP-K121 deembedding base</li> <li>▶ R&amp;S®RTP-K553 external frontend control</li> </ul>
R&S®VSE options, e.g.:	R&S®VSE-KT144 3GPP 5G-NR DL/UL measurements (SL)



R&S®RTP oscilloscope with two external frontends for multichannel analysis

Model	Comment	Order No.
R&S®FE44S	external frontend, 24 GHz to 44 GHz	1338.7001.02
R&S®FE50DTR	external frontend, 36 GHz to 50 GHz	1347.4099.02
R&S®FE110SR	external frontend, 70 GHz to 110 GHz	1348.4840.02
R&S®FE170SR	external frontend, 110 GHz to 170 GHz	1347.9090.02
R&S®RTP164B	high-performance oscilloscope, 16 GHz	1803.7000.16
R&S®RTP-K11	I/Q software interface option	1800.6683.02
R&S®RTP-K121	deembedding base option	1326.3064.02
R&S®RTP-K553	external frontend control option	1803.6890.02
R&S®VSE-KT144	3GPP 5G-NR DL/UL measurements (SL) option	1345.1740.02

# ORDERING INFORMATION

Designation	Type	Order No.
<b>Probes</b>		
<b>Passive probes</b>		
38 MHz, 1:1, 1 M $\Omega$ , 39 pF, 55 V (RMS) CAT II	R&S <sup>®</sup> RT-ZP1X	1333.1370.02
300 MHz, 10:1, 10 M $\Omega$ , 5 mm tip, no probe detection	R&S <sup>®</sup> RT-ZP03S	1803.1001.02
500 MHz, 10:1, 10 M $\Omega$ , 5 mm tip	R&S <sup>®</sup> RT-ZP05S	1333.2401.02
500 MHz, 10:1, 10 M $\Omega$ , 400 V (RMS)	R&S <sup>®</sup> RT-ZP10	1409.7550.00
700 MHz, 10:1, 10 M $\Omega$ , 400 V (RMS)	R&S <sup>®</sup> RT-ZP11	1803.0005.02
Set of 4 $\times$ R&S <sup>®</sup> RT-ZP11 probes	R&S <sup>®</sup> RT-ZP11-4	1801.8167.02
500 MHz, 10:1, 10 M $\Omega$ , 400 V (RMS)	R&S <sup>®</sup> RTM-ZP10	1409.7708.02
700 MHz, 25:1, 1 M $\Omega$ , 30 V (RMS)	R&S <sup>®</sup> RT-ZPMMCX	1803.1599.02
500 MHz, 10:1, 10 M $\Omega$ , 12 pF	R&S <sup>®</sup> RT-ZI10	1326.1761.02
500 MHz, 10:1, 10 M $\Omega$ , 11 pF	R&S <sup>®</sup> RT-ZI10C	1326.3106.02
500 MHz, 10:1, 10 M $\Omega$ , 11 pF, dual-pack of R&S <sup>®</sup> RT-ZI10C	R&S <sup>®</sup> RT-ZI10C-2	1333.1811.02
500 MHz, 10:1, 10 M $\Omega$ , 11 pF, quad-pack of R&S <sup>®</sup> RT-ZI10C	R&S <sup>®</sup> RT-ZI10C-4	1333.1328.02
<b>Passive broadband probes</b>		
8.0 GHz, 10:1, 500 $\Omega$ , 20 V (RMS)	R&S <sup>®</sup> RT-ZZ80	1409.7608.02
<b>Active broadband probes: single-ended</b>		
1.0 GHz, 1 M $\Omega$ , Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZS10E	1418.7007.02
1.0 GHz, 1 M $\Omega$ , R&S <sup>®</sup> ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZS10	1410.4080.02
1.5 GHz, 1 M $\Omega$ , R&S <sup>®</sup> ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZS20	1410.3502.02
3.0 GHz, 1 M $\Omega$ , R&S <sup>®</sup> ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZS30	1410.4309.02
6.0 GHz, 1 M $\Omega$ , R&S <sup>®</sup> ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZS60	1418.7307.02
<b>Active broadband probes: differential</b>		
1.0 GHz, 1 M $\Omega$ , R&S <sup>®</sup> ProbeMeter, micro button, including 10:1 external attenuator, 1 M $\Omega$ , 70 V DC, 46 V AC (peak), Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZD10	1410.4715.02
1.5 GHz, 1 M $\Omega$ , R&S <sup>®</sup> ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZD20	1410.4409.02
3.0 GHz, 1 M $\Omega$ , R&S <sup>®</sup> ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZD30	1410.4609.02
4.5 GHz, 1 M $\Omega$ , R&S <sup>®</sup> ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S <sup>®</sup> RT-ZD40	1410.5205.02
<b>Modular broadband probes</b>		
Probe amplifier module, 1.5 GHz, 10:1 or 2:1, 400 k $\Omega$ (differential mode), 200 k $\Omega$ (single-ended mode)	R&S <sup>®</sup> RT-ZM15	1800.4700.02
Probe amplifier module, 3 GHz, 10:1 or 2:1, 400 k $\Omega$ (differential mode), 200 k $\Omega$ (single-ended mode)	R&S <sup>®</sup> RT-ZM30	1419.3005.02
Probe amplifier module, 6 GHz, 10:1 or 2:1, 400 k $\Omega$ (differential mode), 200 k $\Omega$ (single-ended mode)	R&S <sup>®</sup> RT-ZM60	1419.3105.02
Probe amplifier module, 9 GHz, 10:1 or 2:1, 400 k $\Omega$ (differential mode), 200 k $\Omega$ (single-ended mode)	R&S <sup>®</sup> RT-ZM90	1419.3205.02
Probe amplifier module, 13 GHz, 10:1 or 2:1, 400 k $\Omega$ (differential mode), 200 k $\Omega$ (single-ended mode)	R&S <sup>®</sup> RT-ZM130	1800.4500.02
Probe amplifier module, 16 GHz, 10:1 or 2:1, 400 k $\Omega$ (differential mode), 200 k $\Omega$ (single-ended mode)	R&S <sup>®</sup> RT-ZM160	1800.4600.02
<b>Power rail probe</b>		
2.0 GHz, 1:1, 50 k $\Omega$ , $\pm 0.85$ V, $\pm 60$ V offset, R&S <sup>®</sup> ProbeMeter	R&S <sup>®</sup> RT-ZPR20	1800.5006.02
4.0 GHz, 1:1, 50 k $\Omega$ , $\pm 0.85$ V, $\pm 60$ V offset, R&S <sup>®</sup> ProbeMeter	R&S <sup>®</sup> RT-ZPR40	1800.5406.02
<b>Multichannel power probe</b>		
1 MHz, 5 Msample/s, 2 $\times$ voltage, 2 $\times$ current	R&S <sup>®</sup> RT-ZVC02	1326.0259.02
1 MHz, 5 Msample/s, 4 $\times$ voltage, 4 $\times$ current	R&S <sup>®</sup> RT-ZVC04	1326.0259.04
<b>High voltage probes: passive</b>		
250 MHz, 100:1, 100 M $\Omega$ , 850 V (RMS)	R&S <sup>®</sup> RT-ZH03	1333.0873.02
400 MHz, 100:1, 50 M $\Omega$ , 1000 V (RMS) CAT II	R&S <sup>®</sup> RT-ZH10	1409.7720.02
400 MHz, 1000:1, 50 M $\Omega$ , 1000 V (RMS) CAT II	R&S <sup>®</sup> RT-ZH11	1409.7737.02
500 MHz, 11:1, 100 M $\Omega$ , 600 V (RMS) CAT IV, 1000 V (RMS) CAT III, 3540 V (RMS) CAT 0, for R&S <sup>®</sup> ScopeRider RTH only	R&S <sup>®</sup> RT-ZI11	1326.1810.02
<b>High voltage probes: differential</b>		
200 MHz, 25:1/250:1, 5 M $\Omega$ , $\pm 750$ V, 300 V (RMS) CAT III	R&S <sup>®</sup> RT-ZHD07	1800.2307.02
100 MHz, 50:1/500:1, 10 M $\Omega$ , $\pm 1500$ V, 1000 V (RMS) CAT III	R&S <sup>®</sup> RT-ZHD15	1800.2107.02
200 MHz, 50:1/500:1, 10 M $\Omega$ , $\pm 1500$ V, 1000 V (RMS) CAT III	R&S <sup>®</sup> RT-ZHD16	1800.2207.02
100 MHz, 100:1/1000:1, 40 M $\Omega$ , $\pm 6000$ V, 1000 V (RMS) CAT III	R&S <sup>®</sup> RT-ZHD60	1800.2007.02

Designation	Type	Order No.
<b>Isolated probing system</b>		
Isolated probing system, $\pm 30$ V, 1 kV (RMS) CAT III (depending on tip module), Rohde & Schwarz probe interface and BNC Incl. carrying case; operating manual	R&S®RT-ZISO	1804.5000.02
100 MHz isolated probe package with 3 m length, includes R&S®ZISO-Z301 probe tip	R&S®RT-ZISO01	1804.5000P11
100 MHz isolated probe package with 10 m length, includes R&S®ZISO-Z301 probe tip	R&S®RT-ZISO01L	1804.5000P21
200 MHz isolated probe package with 3 m length, includes R&S®ZISO-Z301 probe tip	R&S®RT-ZISO02	1804.5000P12
200 MHz isolated probe package with 10 m length, includes R&S®ZISO-Z301 probe tip	R&S®RT-ZISO02L	1804.5000P22
350 MHz isolated probe package with 3 m length, includes R&S®ZISO-Z301 probe tip	R&S®RT-ZISO03	1804.5000P13
350 MHz isolated probe package with 10 m length, includes R&S®ZISO-Z301 probe tip	R&S®RT-ZISO03L	1804.5000P23
500 MHz isolated probe package with 3 m length, includes R&S®ZISO-Z301 probe tip	R&S®RT-ZISO05	1804.5000P14
500 MHz isolated probe package with 10 m length, includes R&S®ZISO-Z301 probe tip	R&S®RT-ZISO05L	1804.5000P24
1 GHz isolated probe package with 3 m length, includes R&S®ZISO-Z201 and R&S®ZISO-Z301 probe tips	R&S®RT-ZISO10	1804.5000P15
1 GHz isolated probe package with 10 m length, includes R&S®ZISO-Z201 and R&S®ZISO-Z301 probe tips	R&S®RT-ZISO10L	1804.5000P25
<b>Current probes</b>		
20 kHz, AC/DC, 0.01 V/A and 0.001 V/A, $\pm 200$ A and $\pm 2000$ A	R&S®RT-ZC02	1333.0850.02
100 kHz, AC/DC, 0.1 V/A, 20 A (RMS), $\pm 30$ A (peak)	R&S®RT-ZC03	1333.0844.02
2 MHz, AC/DC, 0.01 V/A, 500 A (RMS), Rohde & Schwarz probe interface	R&S®RT-ZC05B	1409.8204.02
10 MHz, AC/DC, 0.01 V/A, 150 A (RMS)	R&S®RT-ZC10	1409.7750K02
100 MHz, AC/DC, 0.1 V/A, 30 A (RMS)	R&S®RT-ZC20	1409.7766K02
120 MHz, AC/DC, 1 V/A, 5 A (RMS)	R&S®RT-ZC30	1409.7772K02
120 MHz, AC/DC, 0.1 V/A / 1 V/A / 10 V/A, 30 A, 5 A, 0.5 A (RMS)	R&S®RT-ZC31	1801.4932K02
10 MHz, AC/DC, 0.01 V/A, 150 A (RMS), Rohde & Schwarz probe interface	R&S®RT-ZC10B	1409.8210.02
50 MHz, AC/DC, 0.1 V/A, 30 A (RMS), Rohde & Schwarz probe interface	R&S®RT-ZC15B	1409.8227.02
100 MHz, AC/DC, 0.1 V/A, 30 A (RMS), Rohde & Schwarz probe interface	R&S®RT-ZC20B	1409.8233.02
<b>EMC near-field probes</b>		
Compact probe set for E and H near-field measurements, 30 MHz to 3 GHz	R&S®HZ-15	1147.2736.02
Compact H near-field probe set, 30 MHz to 3 GHz	R&S®HZ-17	1339.4141.02
<b>Logic probes (included with R&amp;S®RTx-B1 mixed signal oscilloscope options)</b>		
300 MHz logic probe, 8 channels	R&S®RT-ZL03	1333.0715.02
400 MHz logic probe, 8 channels	R&S®RT-ZL04	1333.0721.02
<b>Probe accessories</b>		
Accessory set for R&S®RT-ZP10 and R&S®RT-ZP1X passive probes (2.5 mm probe tip)	R&S®RT-ZA1	1409.7566.00
Spare accessory set for R&S®RT-ZS10/10E/20/30	R&S®RT-ZA2	1416.0405.02
Pin set for R&S®RT-ZS10/10E/20/30	R&S®RT-ZA3	1416.0411.02
Mini clips	R&S®RT-ZA4	1416.0428.02
Micro clips	R&S®RT-ZA5	1416.0434.02
Lead set	R&S®RT-ZA6	1416.0440.02
Pin set for R&S®RT-ZD10/20/30	R&S®RT-ZA7	1417.0609.02
Pin set for R&S®RT-ZD40	R&S®RT-ZA8	1417.0867.02
N(m) adapter for R&S®RT-Zxx oscilloscope probes	R&S®RT-ZA9	1417.0909.02
SMA adapter	R&S®RT-ZA10	1416.0457.02
BNC/banana adapter	R&S®RT-ZA11	1333.0796.02
PT100 temperature probe, $-50^{\circ}\text{C}$ to $+400^{\circ}\text{C}$ , 2-wire	R&S®RT-ZA12	1333.0809.02
Power supply for probes	R&S®RT-ZA13	1409.7789.02
Spare power supply, for R&S®ScopeRider RTH, incl. power plugs for EU, GB, US	R&S®RT-ZA14	1326.2874.02
External attenuator 10:1, 2.0 GHz, 1.3 pF, 60 V DC, 42.4 V AC (peak) for R&S®RT-ZD20/30 probes	R&S®RT-ZA15	1410.4744.02
16 GHz PBNC to SMA adapter	R&S®RT-ZA16	1320.7074.02
Matched pair TDR cable	R&S®RT-ZA17	1337.8991.02
Accessory case for R&S®RTx oscilloscopes	R&S®RT-ZA19	1335.7875.02
Accessory set for R&S®RT-ZI10/11	R&S®RT-ZA20	1326.1978.02
Extension set for R&S®RT-ZI10/11	R&S®RT-ZA21	1326.1984.02
Test leads, 600 V CAT IV	R&S®RT-ZA22	1326.0988.02

Designation	Type	Order No.
Replacement kit for R&S®RT-ZHD probes	R&S®RT-ZA24	1800.2707.00
Power rail browser kit, included with R&S®RT-ZPR20/40	R&S®RT-ZA25	1800.5329.00
Pigtail cable, 15 cm, solder-in, SMA for R&S®RT-ZPR20/40	R&S®RT-ZA26	1800.5258.00
PCB adapter, 2.5 mm	R&S®RT-ZA27	1801.4784.02
PCB adapter, 2.5 mm angle	R&S®RT-ZA28	1801.4790.02
Probe positioner, 2 legs	R&S®RT-ZA29	1801.4803.02
Extended cable set for R&S®RT-ZVC, PCB probing, 1 current and 1 voltage lead, length: 32 cm	R&S®RT-ZA30	1333.1686.02
Extended cable set for R&S®RT-ZVC, 4 mm probing, 1 current and 1 voltage lead, length: 32 cm	R&S®RT-ZA31	1333.1692.02
Power adapter	R&S®RT-ZA32	1333.1705.02
Oscilloscope interface cable for R&S®RT-ZVC (included with R&S®RT-ZVC02/04)	R&S®RT-ZA33	1333.1770.02
Extended cable set for R&S®RT-ZVC, 4 mm probing, 1 current and 1 voltage lead, length: 1 m	R&S®RT-ZA34	1333.1892.02
Extended cable set for R&S®RT-ZVC, PCB probing, 1 current and 1 voltage lead, length: 1 m	R&S®RT-ZA35	1333.1905.02
Solder-in cable set for R&S®RT-ZVC, 4 current and voltage solder-in cables, solder-in pins	R&S®RT-ZA36	1333.1911.02
Extended cable set for R&S®RT-ZVC, BNC connector, 1 current and 1 voltage lead, length: 16 cm	R&S®RT-ZA37	1337.9130.02
Probe tip accessory set for R&S®RT-ZP03S, R&S®RT-ZP05S, R&S®HZO10 and R&S®RT-ZH03	R&S®RT-ZA40	1338.0742.02
Accessory set for R&S®RT(M)-ZP10, R&S®RT-ZP11 and R&S®RT-ZP1X	R&S®RT-ZA41	1802.9867.02
Adapter, Rohde&Schwarz probe interface to 2.92 mm/3.5 mm/SMA, incl. USB-C port	R&S®RT-ZA50	1803.5265.02
Adapter, 2.92 mm/3.5 mm/SMA to Rohde&Schwarz probe interface, incl. USB-C port	R&S®RT-ZA51	1803.5365.02
MMCX solder-in cable HT	R&S®RT-ZAMXHTS	1803.1660.02
MMCX to solder-in flex HT	R&S®RT-ZAMXPAD	1803.1653.02
MMCX to dual square pin	R&S®RT-ZAMXSQ	1803.1647.02
MMCX to U.FL adapter	R&S®RT-ZAMXUFL	1803.1676.02
Power deskew and calibration test fixture	R&S®RT-ZF20	1800.0004.02
3 GHz, 20 dB preamplifier, 100 V to 230 V power adapter, for R&S®HZ-15	R&S®HZ-16	1147.2720.02
For R&S®RT-ZM probe amplifier module		
3D positioner with central tensioning knob for easy clamping and positioning of probes (span width: 200 mm, clamping range: 15 mm)	R&S®RT-ZAP	1326.3641.02
Probe tip module case for up to 6 R&S®RT-ZMAxx probe tip modules	R&S®RT-ZMA1	1419.3928.02
Solder-in probe tip module, up to 16 GHz	R&S®RT-ZMA10	1419.4301.02
Set of 6 R&S®RT-ZMA10 solder-in probe tip modules	R&S®RT-ZMA10-6	1801.4349.02
Solder-in probe tip module for extended temperature range from -55°C to +125°C, up to 16 GHz	R&S®RT-ZMA11	1419.4318.02
Square-pin probe tip module, up to 6 GHz	R&S®RT-ZMA12	1419.4324.02
Flex connect solder-in probe tip module up to 16 GHz for R&S®RT-ZM probe amplifier module, length: 15 cm, multimode P/N/DM/CM	R&S®RT-ZMA14	1338.1010.02
Quick-connect probe tip module, up to 12 GHz	R&S®RT-ZMA15	1419.4224.02
Browser module, up to 16 GHz	R&S®RT-ZMA30	1419.4353.02
SMA module, up to 16 GHz	R&S®RT-ZMA40	1419.4201.02
Extreme temperature kit, up to 12 GHz	R&S®RT-ZMA50	1419.4218.02
Deskew fixture for power measurements	R&S®RT-ZF20	1800.0004.02
Test fixture for probe characterization with R&S®RTP-B7	R&S®RT-ZF30	1333.2099.02
<b>Accessories</b>		
1 MΩ adapter, for R&S®RTP oscilloscope	R&S®RT-Z1M	1337.9200.02
Probe pouch, for R&S®RTO6 oscilloscopes	R&S®RTO-Z5	1317.7031.02
Digital extension port, for R&S®RT-ZVC usage with the R&S®RTO6 oscilloscope (included with R&S®RTO6-B1)	R&S®RTO6-B1E	1801.6735.02
Digital extension port, for R&S®RT-ZVC usage with the R&S®RTP oscilloscope (included with R&S®RTP-B1)	R&S®RTP-B1E	1337.9581.02
Probe interface adapter, for selected Tektronix probes with TekProbe-BNC level II interface	R&S®RT-Z2T	1338.0007.02

## Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Service at Rohde & Schwarz You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

## Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

