


HDMI CTS Sink Test Library Manual



2115.7916.02 – 03

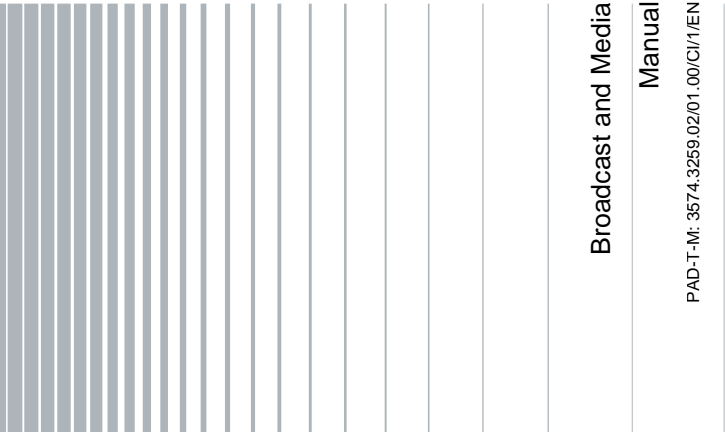

The manual describes the content of the HDMI CTS sink test library (2115.7900.00). The library is part of:

R&S®VT-B2362 2115.7700.06

R&S®VT-B2363 2115.7716.06

© 2016 Rohde & Schwarz GmbH & Co. KG

Muehldorfstr. 15, 81671 Munich, Germany

Phone: +49 89 41 29 - 0

Fax: +49 89 41 29 12 164

E-mail: info@rohde-schwarz.com

Internet: <http://www.rohde-schwarz.com>

Subject to change – Data without tolerance limits is not binding.

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG.

Trade names are trademarks of the owners.

The following abbreviations are used throughout this manual:

R&S®XYZ123 is abbreviated as R&S XYZ123

Contents

1	Getting Started	4
1.1	Contents of the Disk	4
1.2	Version History	4
1.3	System Requirements	4
1.4	Installation Instructions	5
2	Using the Library	5

1 Getting Started

This disk contains HDMI signal files that are used in the HDMI generator application of the instrument.

1.1 Contents of the Disk

- This document
- Install.bat
- HDMI.exe
- 7z archive files

1.2 Version History



For information on the current firmware version refer to the release notes of the instrument.

1.2.1 Version 1.20

Updated HDR test pattern with new video content.

Updated 3D test pattern with 3D picture content.

1.2.2 Version 1.10

New HDR test pattern.

Updated test pattern for 21:9 testing: circle element added to determine the correct aspect ratio.

1.2.3 Version 1.00

Initial release.

1.3 System Requirements

The Rohde & Schwarz Web Configurator shows you the required hardware and software options. It is provided in the Internet: On the Rohde & Schwarz Home Page (<http://www.rohde-schwarz.com>), go to the instrument-specific site and configure your product. If you need any further information, refer to the help of the Rohde & Schwarz Web Configurator.

1.4 Installation Instructions

To install the HDMI CTS sink test library on the instrument, the following procedure is recommended:

1. Copy the complete content of the disk to a USB flash memory.
2. Connect the USB flash memory to the instrument.
3. Open the file explorer and navigate to the folder on the USB flash memory that contains the copied disk content.
4. Execute the `Install.bat` file and wait for the installation routine to complete the setup.

2 Using the Library

The content of the library is integrated in the CTS test cases of the HDMI generator application. For further details refer to the user manual of the instrument.